บริษัท เดนโก้อินดัสทรี จำกัด
DENCO INDUSTRY CO., LTD

CATALOGUE 2020

ENCLOSURES | POWER DISTRIBUTION | LADDER / TRAY / WIREWAY | SOLAR PUMP | VENTILATION

DENCO

DENCO INDUSTRY CO., LTD designs and manufactures a wide range of electrical products. Since 2009, we continuously develop our product to reach the customer's satisfaction by researching and experimenting to create sophisticated production process.

We not only produce sophisticated standard products but also have an expert team to consult, design and convert customers ideas to completed products. Others from fulfill customer need, we also can produce and transport our product in time.

Throughout the time that we have founded, our services have never done just after delivery but we continuously take care of our customer to make sure that we still reach our customer's satisfaction.

ISO 9001
BUREAU VERITAS
Certification

CONTENT

01

STEEL COMPACT ENCLOSURE
ตู้เหล็กกันฝุ่น/กันน้ำ

ตู้กันฝุ่น DA 03
ตู้กันน้ำ DS 05
ตู้กันน้ำ DSS 07
ตู้กันน้ำ DSG 09
ตู้กันน้ำ DX 11
ตู้ PULL BOX 13

15

STAINLESS COMPACT ENCLOSURE
ตู้สแตนเลสกันฝุ่น/กันน้ำ

ตู้กันฝุ่น DA-S 17
ตู้กันน้ำ DS-S 19
ตู้กันน้ำ DSS-S 21
ตู้กันน้ำ DSG-S 23

25

MAIN DISTRIBUTION BOARD
ตู้เมนสวิทช์บอร์ด

1 ห้อง 28
2 ห้อง 29
3 ห้อง 30

31

CONSOLE DESK+ COMPUTER PANEL+ MAIN OUTDOOR TYPE

ตู้เฉียง DC 33
ตู้คอม DP 34
ตู้ outdoor DO 35

37

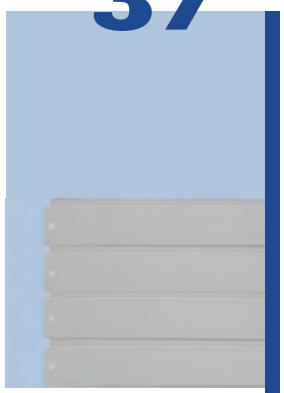

WIREWAY

วายเวย์ 1 mm. 39
อุปกรณ์วายเวย์ 1 mm. 40
วายเวย์ 0.7 mm. 41
อุปกรณ์วายเวย์ 0.7 mm. 42

43

CABLE LADDER DQR

แลดเดอร์ 45
อุปกรณ์แลดเดอร์ 46

49

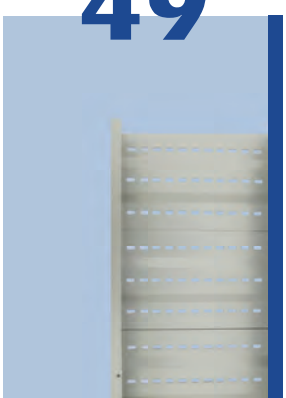

CABLE TRAY DSR

เทรย์ 51
อุปกรณ์เทรย์ 52

55

SOLAR PUMP DCSP

โซล่าร์ ปั๊ม 57

59

SHELF D-CASE

ชั้นวางของ 61

63

ACCESSORIES

กุญแจ 65
ยาง 66
สีเสปรย์ 66
กระจก / เพลท 67
พัดลม 68

DENCO

COMPACT ENCLOSURE

DENCO

STEEL COMPACT ENCLOSURE

Our steel compact enclosures have 5 alternative model along with 20 standard sizes. Which can be customized according to customer's requirements. DA model is designed for dust protection while DS, DSS and DSG are designed for water protection. Especially DX is extremely waterproofing.

Technical data

- (A.) Push lock system
- (B.) Door sealed with PU gasket
- (C.) Bottom plate for cable input
- Internal mounting plate included
- Fixing earth stud included

Dimensions

IP 40

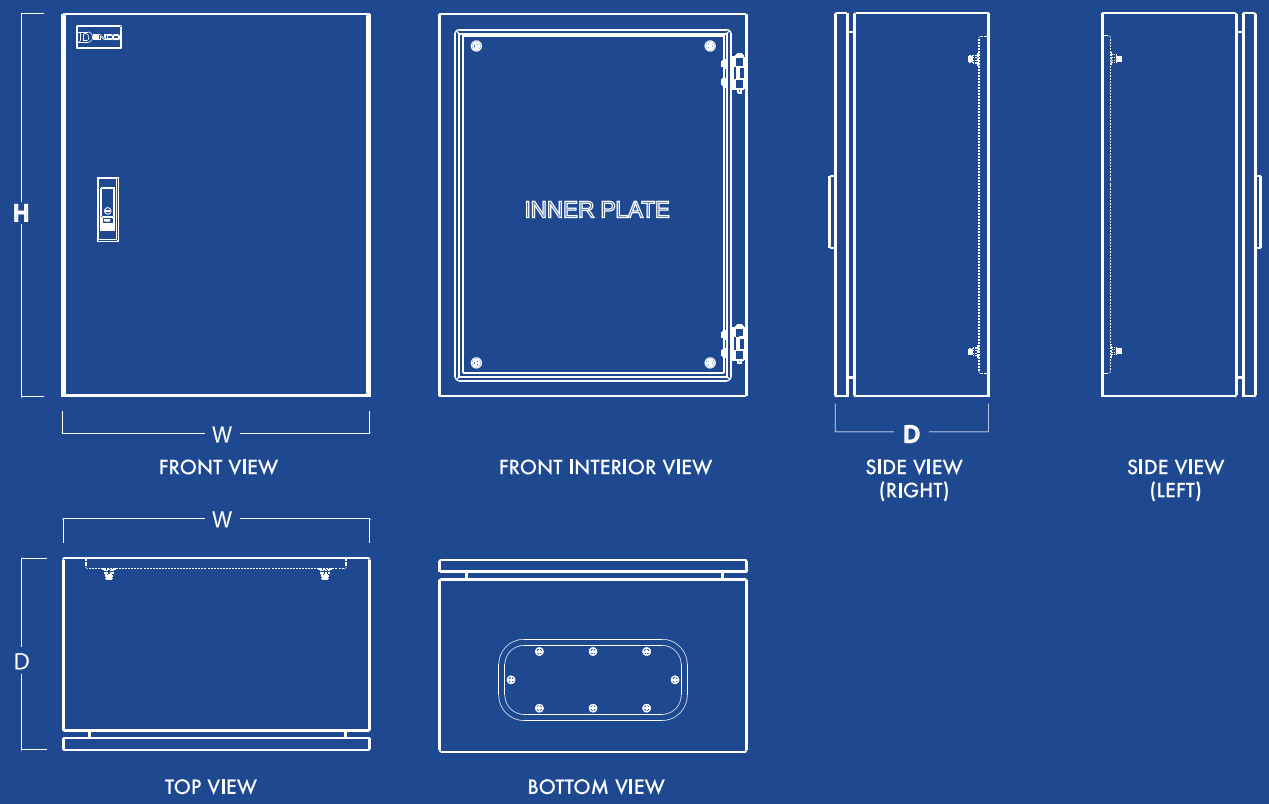

Specification

Material

Enclosure

Body
steel sheet
1.0 mm.(DA 01-14)
1.5 mm.(DA 15-20)

Key lock
DENCO
59Lock - 01
(see page 65)

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated in texture RAL 7032

Major Application

Dust contaminated environments

Agricultural machines

Other machines

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DA - 01	280	350	150	600
DA - 02	300	450	150	830
DA - 03	350	450	150	930
DA - 04	300	450	200	950
DA - 05	350	450	200	1,000
DA - 06	350	500	200	1,100
DA - 07	400	500	200	1,200
DA - 08	450	600	200	1,290
DA - 09	450	600	250	1,350
DA - 10	500	600	200	1,450

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DA - 11	500	600	250	1,550
DA - 12	550	700	250	1,750
DA - 13	630	750	250	1,820
DA - 14	630	900	250	2,300
DA - 15	600	1100	250	3,300
DA - 16	700	1100	250	3,600
DA - 17	800	1200	250	4,000
DA - 18	900	1200	250	4,800
DA - 19	800	1200	300	5,200
DA - 20	900	1200	300	5,500

Technical data



- (A.) Single door type
- (B.) Door sealed with PU gasket
- (C.) Bottom plate sealed with PU gasket for cable input
- Rain canopy against water
- Fixing earth stud included
- Internal mounting plate included

Dimensions

IP 45

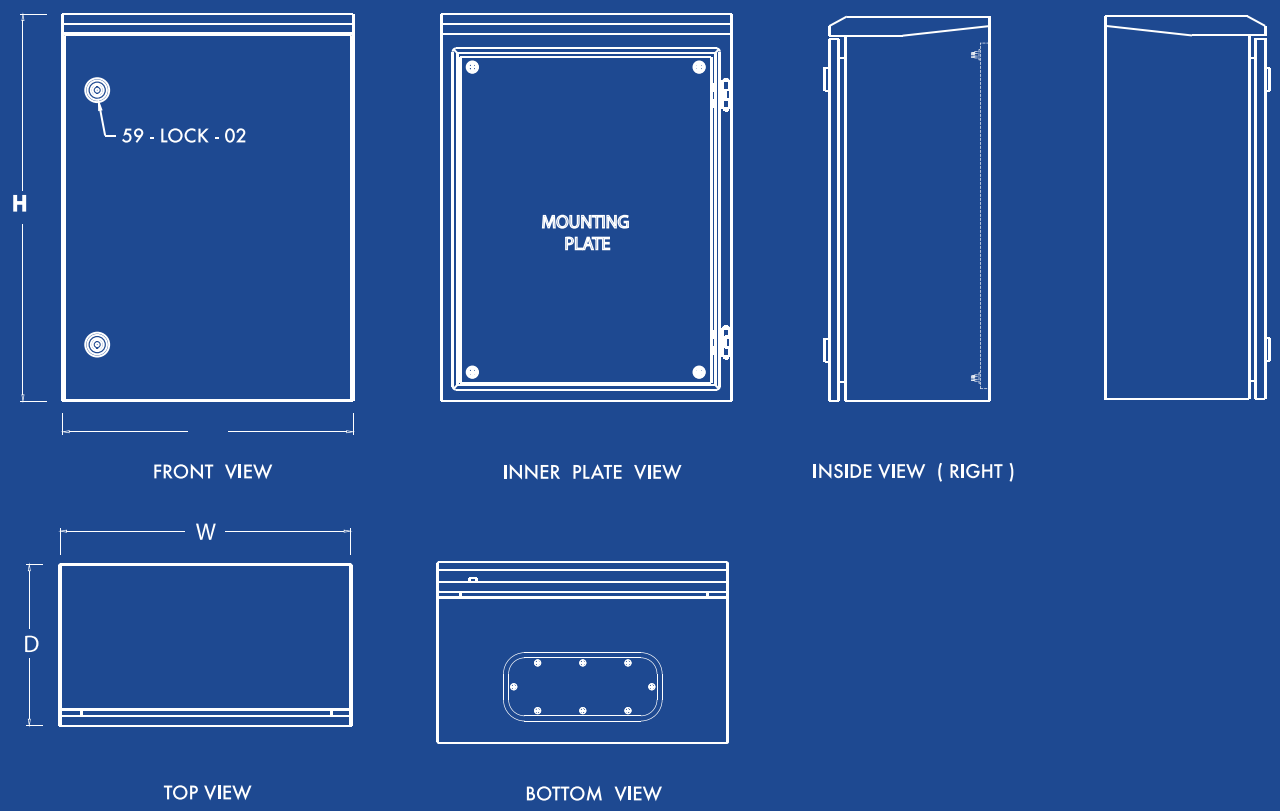

Specification

Material

Enclosure
Steel sheet
1.5 mm.
All Enclosure

Key lock
DENCO
59Lock - 02
(see page 65)

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated in texture RAL 7032

Major Application

Water spray environment

Controlling waste water treatment system

Outdoor sport stadium

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DS- 01	280	350	150	1,050
DS - 02	300	450	150	1,170
DS - 03	350	450	150	1,260
DS - 04	300	450	200	1,290
DS- 05	350	450	200	1,380
DS - 06	350	500	200	1,550
DS - 07	400	500	200	1,695
DS - 08	450	600	200	1,780
DS - 09	450	600	250	1,920
DS - 10	500	600	200	2,100

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DS- 11	500	600	250	2,250
DS - 12	550	700	250	2,400
DS - 13	630	750	250	2,750
DS - 14	630	900	250	3,200
DS- 15	600	1100	250	3,880
DS-16	700	1100	250	4,400
DS-17	800	1200	250	4,850
DS-18	900	1200	250	5,200
DS-19	800	1200	300	5,500
DS -20	900	1200	300	6,000

DSS COMPACT ENCLOSURE

Technical data

- (A.) Double door type
- (B.) Door sealed with PU gasket
- (C.) Bottom plate sealed with PU gasket for cable input
- Rain canopy against water
- Fixing earth stud included
- Internal mounting plate included

Dimensions

IP 45

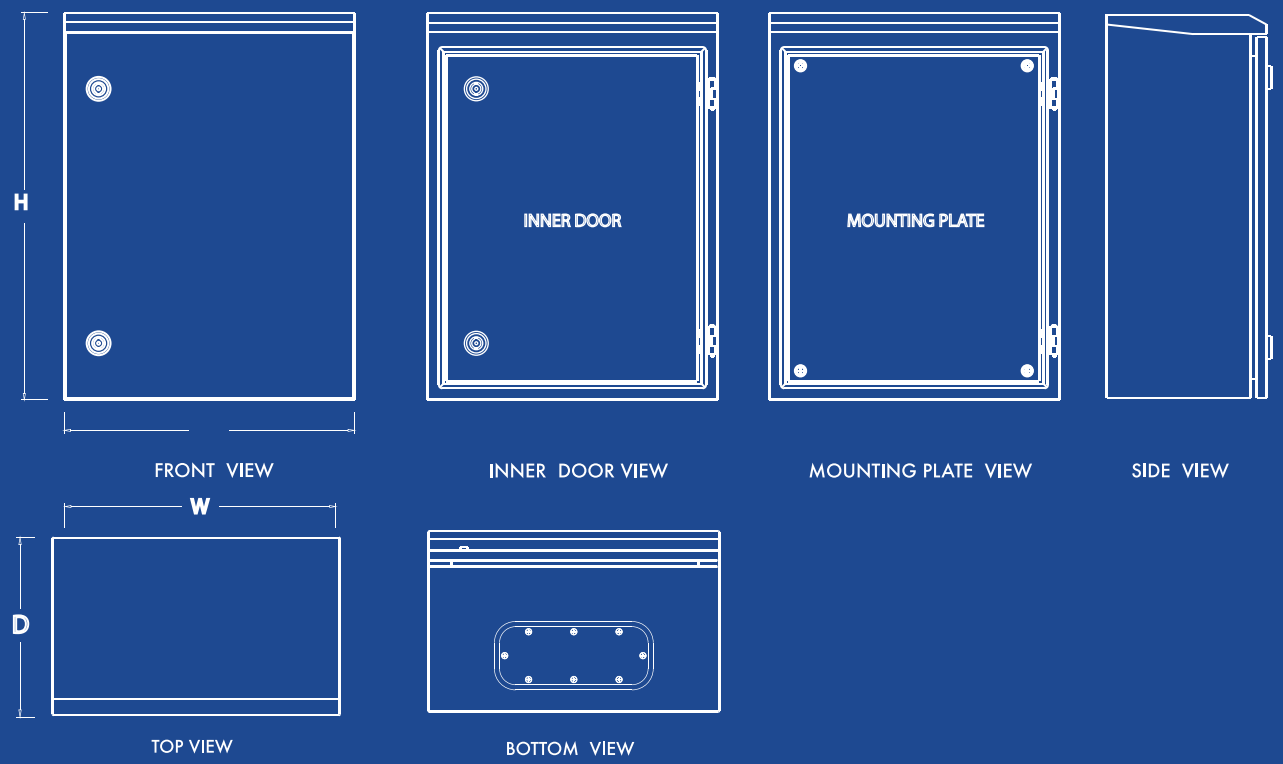

Specification

Material

Enclosure
Steel sheet
1.5 mm.
All Enclosure

Key lock
DENCO
59Lock - 02
(see page 65)

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated in texture RAL 7032

Major Application

Water spray environment

Controlling waste water treatment system

Outdoor sport stadium

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSS-01	280	350	150	1,265
DSS-02	300	450	150	1,460
DSS-03	350	450	150	1,560
DSS-04	300	450	200	1,585
DSS-05	350	450	200	1,650
DSS-06	350	500	200	1,780
DSS-07	400	500	200	1,950
DSS-08	450	600	200	2,150
DSS-09	450	600	250	2,300
DSS-10	500	600	200	2,420

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSS-11	500	600	250	2,465
DSS-12	550	700	250	2,720
DSS-13	630	750	250	3,600
DSS-14	630	900	250	3,870
DSS-15	600	1100	250	4,250
DSS-16	700	1100	250	4,950
DSS-17	800	1200	250	5,100
DSS-18	900	1200	250	5,600
DSS-19	800	1200	300	6,000
DSS-20	900	1200	300	6,500

Technical data

- (A.) Double door type / Viewing window
- (B.) Door sealed with PU gasket
- (C.) Bottom plate sealed with PU gasket for cable input
- Rain canopy against water
- Fixing earth stud included
- Internal mounting plate included

IP 45

Dimensions

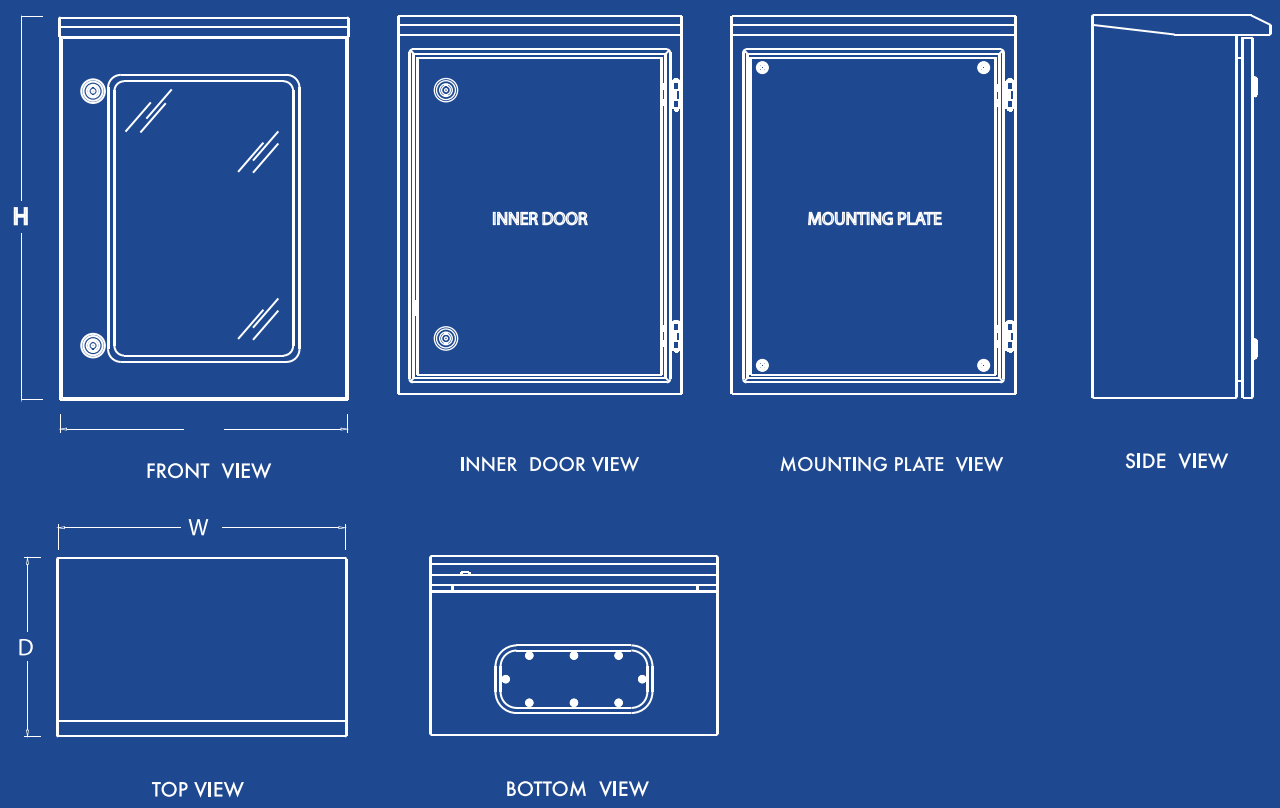

Specification

Material

Enclosure
Steel sheet
1.5 mm.
All Enclosure

Key lock
DENCO
59Lock - 02
(see page 65)

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated in texture RAL 7032

Major Application

Water spray environment

Controlling waste water treatment system

Outdoor sport stadium

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSG - 01	280	350	150	1,550
DSG - 02	300	450	150	1,770
DSG - 03	350	450	150	1,890
DSG - 04	300	450	200	1,920
DSG - 05	350	450	200	1,980
DSG - 06	350	500	200	2,100
DSG - 07	400	500	200	2,280
DSG - 08	450	600	200	2,400
DSG - 09	450	600	250	2,650
DSG - 10	500	600	200	2,850

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSG - 11	500	600	250	2,970
DSG - 12	550	700	250	3,200
DSG - 13	630	750	250	4,000
DSG - 14	630	900	250	4,550
DSG - 15	600	1100	250	5,100
DSG - 16	700	1100	250	5,500
DSG - 17	800	1200	250	5,800
DSG - 18	900	1200	250	6,300
DSG - 19	800	1200	300	6,800
DSG - 20	900	1200	300	7,200

Technical data



- (A.) Swing Handle lock system
- (B.) Door sealed with PU gasket
- (C.) Pocket strip for wiring plan
- Internal mounting plate included
- Fixing earth stud included

Dimensions

IP 65

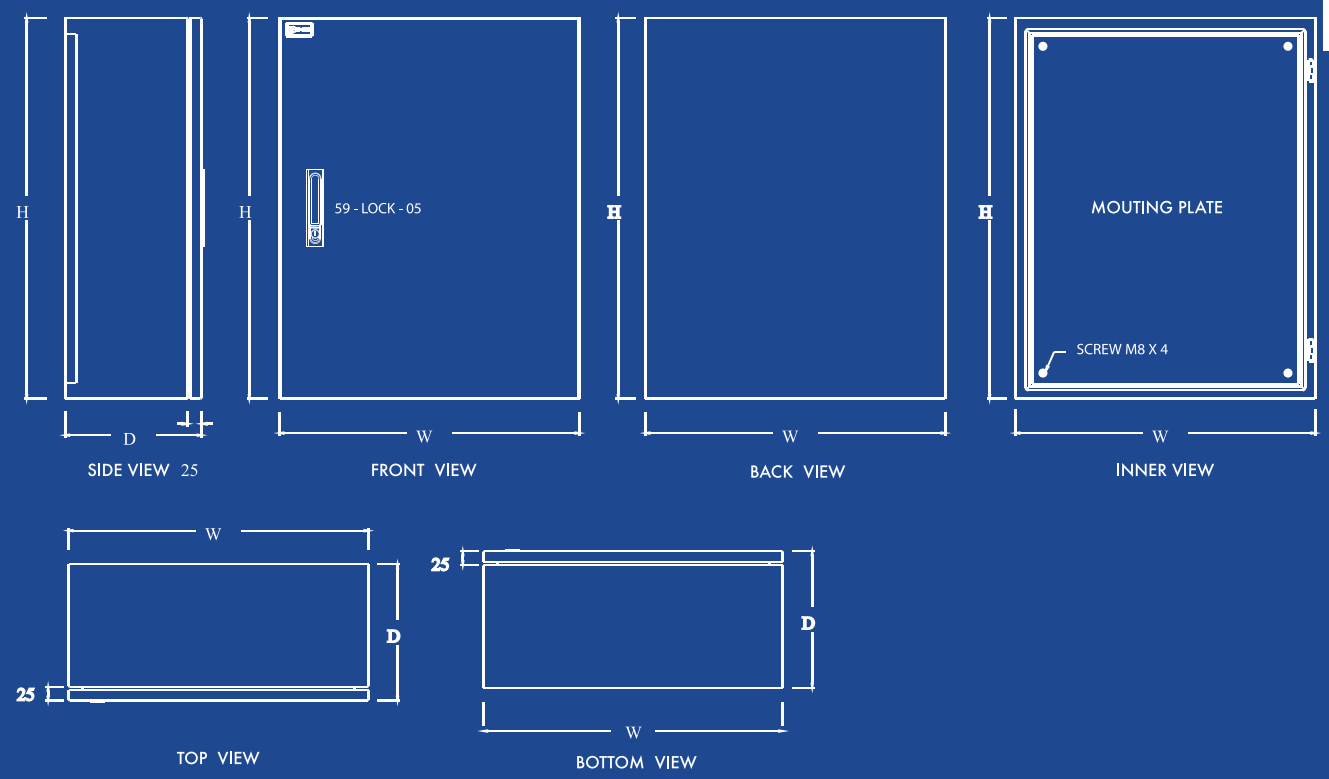

Specification

Material

Enclosure

Steel sheet
2.0 mm.
All enclosure

Key lock

DENCO
59Lock - 05
(see page 65)

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated with UV protection (RAL 7032)

Major Application

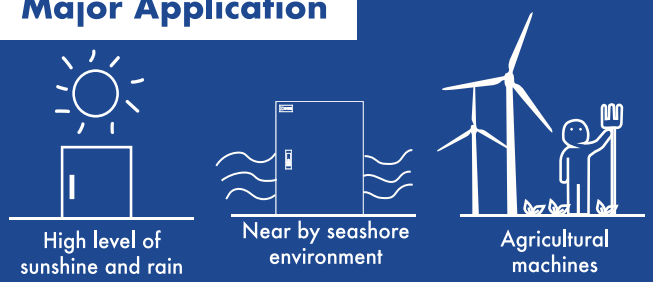

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DX - 01	280	350	150	2,700
DX - 02	300	450	150	3,000
DX - 03	350	450	150	3,200
DX - 04	300	450	200	3,500
DX - 05	350	450	200	3,800
DX - 06	350	500	200	4,200
DX - 07	400	500	200	4,500
DX - 08	450	600	200	4,800
DX - 09	450	600	250	5,100
DX - 10	500	600	200	5,400

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DX- 11	500	600	250	5,700
DX- 12	550	700	250	6,000
DX- 13	630	750	250	6,300
DX- 14	630	900	250	6,700
DX- 15	600	1100	250	7,200
DX- 16	700	1100	250	7,500
DX- 17	800	1200	250	7,800
DX- 18	900	1200	250	8,200
DX- 19	800	1200	300	8,500
DX - 20	900	1200	300	8,800

Technical data





- (A.) Screw lock
- (B.) Internal mounting plate included
- Fixing earth stud included

Dimensions

IP 40



FRONT & BACK VIEW

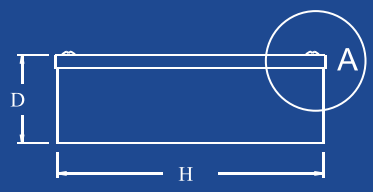

SIDE VIEW LEFT & RIGHT

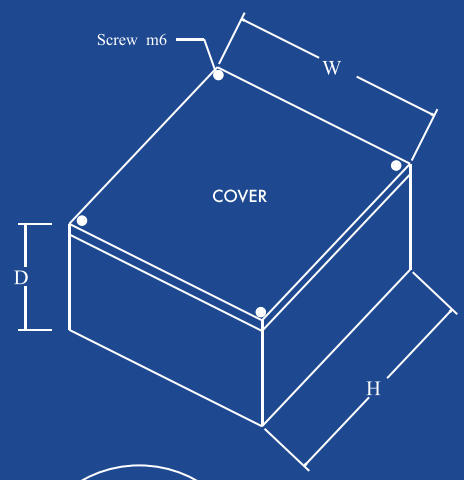



TOP VIEW



TOP VIEW WITHOUT COVER



Specification

Material



Enclosure
Steel sheet
1.0 mm.
All enclosure

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated in texture RAL 7032

Major Application



Dust contaminated environments

Door controlling



Junction box for trunking system

(see page 37)

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DB - 01	100	150	100	250
DB - 02	150	150	100	300
DB - 03	200	150	150	400
DB - 04	200	200	150	450

DENCO

COMPACT ENCLOSURE

DENCO

STAINLESS COMPACT ENCLOSURE

Our stainless compact enclosure is suitable for both wall installation and freestanding. We provide 4 model types with 20 standard sizes each depend on your demand and requirement. Those models wasdesigned to installed nearby seashore environment and the area that required high level of hygienic such as hospital and food industry etc.

Technical data

- (A.) Push lock system (silver lock)
- (B.) Door sealed with PU gasket
- (C.) Bottom plate for cable input
- Internal mounting plate included
- Fixing earth stud included

Dimensions

IP 40

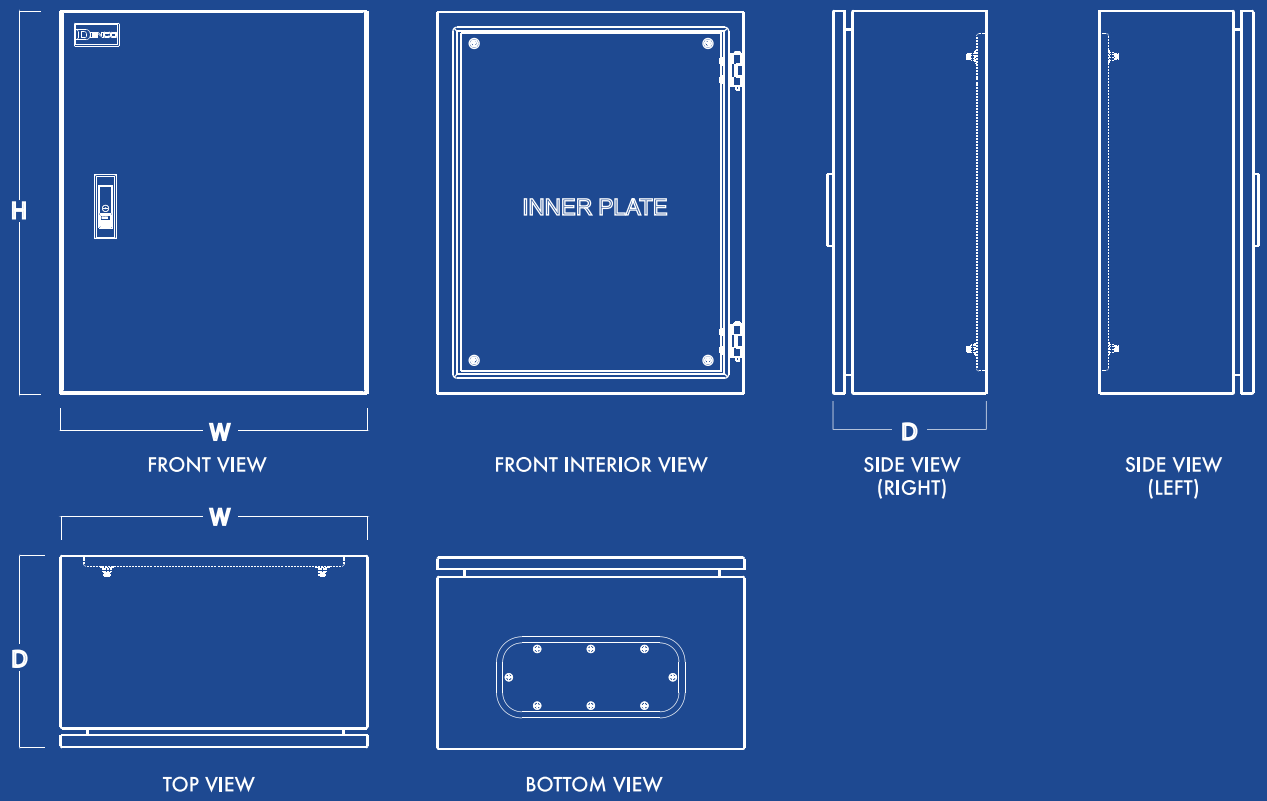

Specification

Material	Surface finish
Enclosure: stainless steel sheet 1.0 mm.(DA 01-14) 1.5 mm.(DA 15-20)	⊕ Brushed
Key lock: DENCO 59Lock - 08 (see page 65)	

Major Application

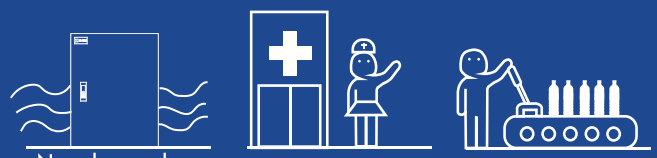

Near by seashore environment

Hygiene area

Food - Beverage processing

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DA-S-01	280	350	150	5,000
DA-S-02	300	450	150	5,700
DA-S-03	350	450	150	6,500
DA-S-04	300	450	200	7,000
DA-S-05	350	450	200	7,800
DA-S-06	350	500	200	8,500
DA-S-07	400	500	200	9,200
DA-S-08	450	600	200	10,000
DA-S-09	450	600	250	10,800
DA-S-10	500	600	200	11,400

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DA-S-11	500	600	250	12,000
DA-S-12	550	700	250	12,800
DA-S-13	630	750	250	13,500
DA-S-14	630	900	250	14,300
DA-S-15	600	1100	250	16,800
DA-S-16	700	1100	250	18,200
DA-S-17	800	1200	250	19,800
DA-S-18	900	1200	250	21,200
DA-S-19	800	1200	300	22,500
DA-S-20	900	1200	300	24,500

Technical data



- (A.) Single door type
- (B.) Door sealed with PU gasket
- (C.) Bottom plate sealed with PU gasket for cable input
- Rain canopy against water
- Fixing earth stud included
- Internal mounting plate included

Dimensions

IP 45

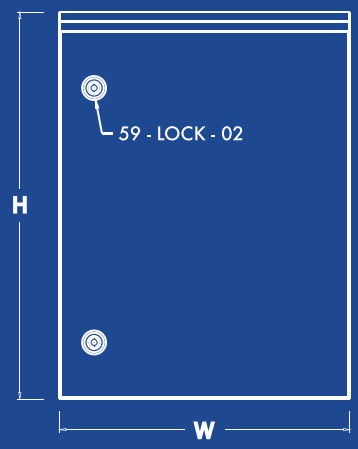

FRONT VIEW

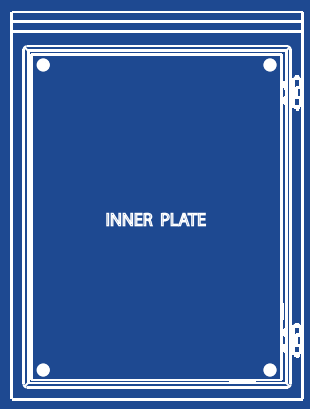

INNER PLATE VIEW

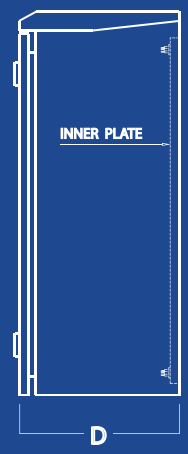

INSIDE VIEW (RIGHT)

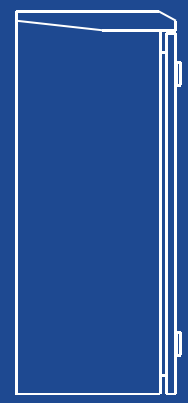

SIDE VIEW (LEFT)



TOP VIEW



BOTTOM VIEW

Specification

Material

Enclosure

Stainless steel sheet
1.5 mm.
All Enclosure

Key lock

DENCO
59Lock - 02
(see page 65)

Surface finish

⊕ Brushed

Major Application



Near by seashore environment



Water spray environment



Hygiene area

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DS-S-01	280	350	150	6,000
DS-S-02	300	450	150	7,200
DS-S-03	350	450	150	7,800
DS-S-04	300	450	200	8,500
DS-S-05	350	450	200	9,200
DS-S-06	350	500	200	10,000
DS-S-07	400	500	200	10,700
DS-S-08	450	600	200	11,500
DS-S-09	450	600	250	12,000
DS-S-10	500	600	200	12,900

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DS-S-11	500	600	250	13,500
DS-S-12	550	700	250	14,200
DS-S-13	630	750	250	15,000
DS-S-14	630	900	250	15,800
DS-S-15	600	1100	250	17,000
DS-S-16	700	1100	250	18,500
DS-S-17	800	1200	250	20,000
DS-S-18	900	1200	250	21,500
DS-S-19	800	1200	300	23,000
DS-S-20	900	1200	300	25,000

Technical data

- (A.) Double door type
- (B.) Door sealed with PU gasket
- (C.) Bottom plate sealed with PU gasket for cable input
- Rain canopy against water
- Fixing earth stud included
- Internal mounting plate included

Dimensions

IP 45

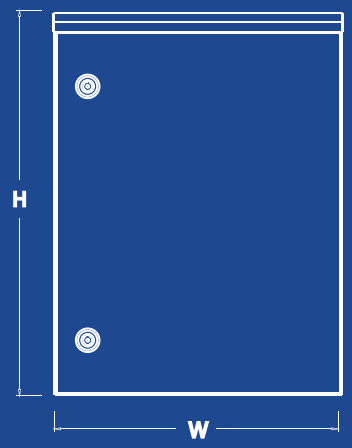

FRONT VIEW

INNER DOOR VIEW

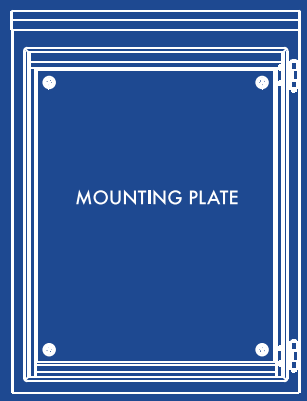

MOUNTING PLATE VIEW

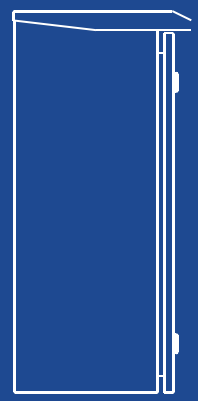

SIDE VIEW

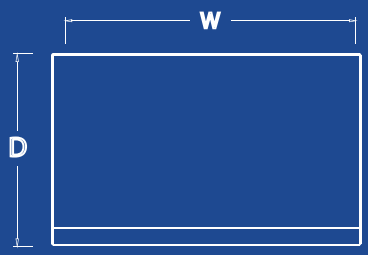

TOP VIEW



BOTTOM VIEW

Specification

Material



Enclosure
Stainles steel sheet
1.5 mm.
All Enclosure

Key lock
DENCO
59Lock - 02
(see page 65)

Surface finish

⊕ Brushed

Major Application



Near by seashore environment

Water spray environment

Hygiene area

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSS-S-01	280	350	150	6,800
DSS-S-02	300	450	150	7,800
DSS-S-03	350	450	150	8,500
DSS-S-04	300	450	200	9,200
DSS-S-05	350	450	200	10,000
DSS-S-06	350	500	200	10,700
DSS-S-07	400	500	200	11,500
DSS-S-08	450	600	200	12,900
DSS-S-09	450	600	250	13,500
DSS-S-10	500	600	200	14,200

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSS-S-11	500	600	250	15,000
DSS-S-12	550	700	250	15,800
DSS-S-13	630	750	250	16,500
DSS-S-14	630	900	250	17,000
DSS-S-15	600	1100	250	18,500
DSS-S-16	700	1100	250	20,000
DSS-S-17	800	1200	250	21,500
DSS-S-18	900	1200	250	23,000
DSS-S-19	800	1200	300	24,500
DSS-S-20	900	1200	300	26,000

Technical data

- (A.) Double door type / Viewing window
- (B.) Door sealed with PU gasket
- Bottom plate sealed with PU gasket for cable input
- (C.)Rain canopy against water
- Fixing earth stud included
- Internal mounting plate included

Dimensions

IP 45

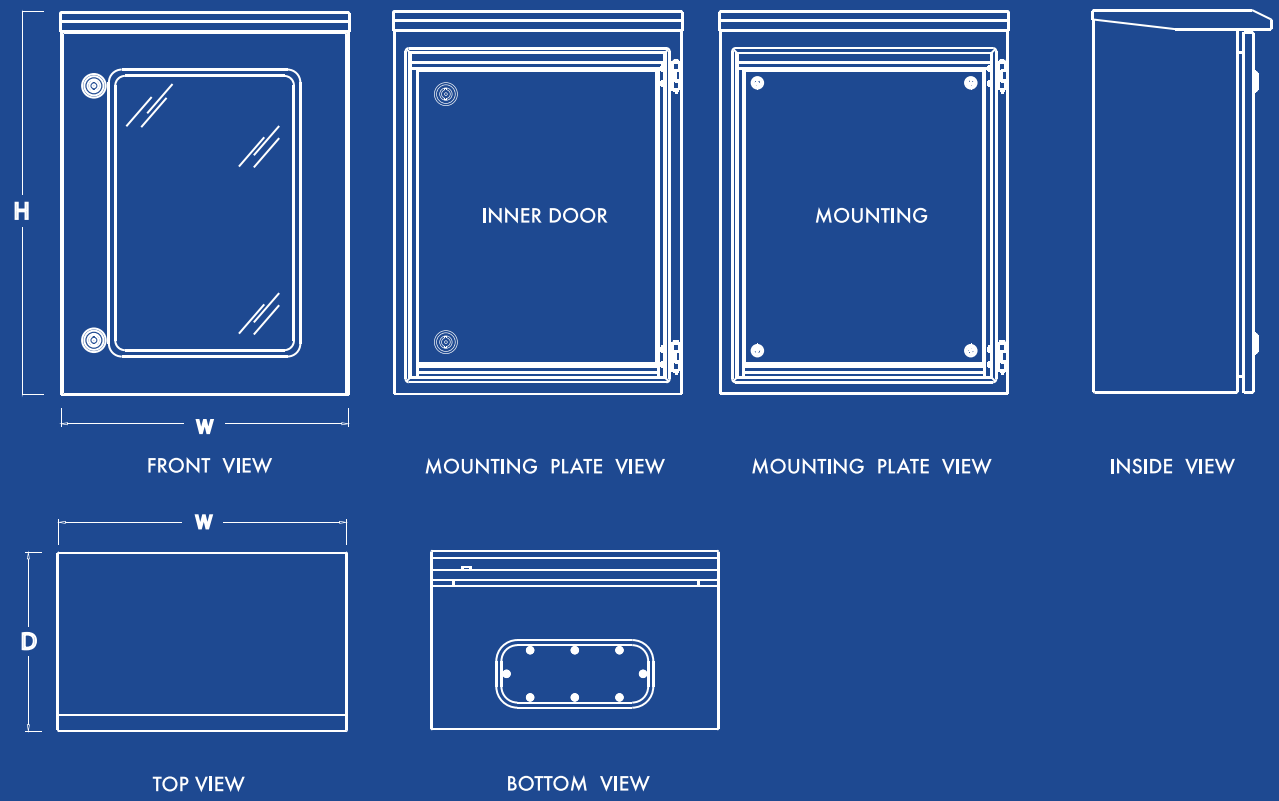

FRONT VIEW | MOUNTING PLATE VIEW | MOUNTING PLATE VIEW | INSIDE VIEW

TOP VIEW | BOTTOM VIEW

Specification

Material

Enclosure
Stainless steel sheet
1.5 mm.
All Enclosure

Key lock
DENCO
59Lock - 02
(see page 65)

Surface finish

⊕ Brushed

Major Application

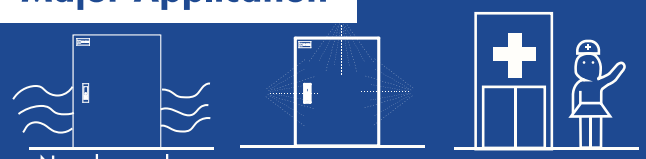

Near by seashore environment | Water spray environment | Hygiene area

Product price

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSG-S-01	280	350	150	7,200
DSG-S-02	300	450	150	8,500
DSG-S-03	350	450	150	9,200
DSG-S-04	300	450	200	10,000
DSG-S-05	350	450	200	10,700
DSG-S-06	350	500	200	11,500
DSG-S-07	400	500	200	12,000
DSG-S-08	450	600	200	13,500
DSG-S-09	450	600	250	14,200
DSG-S-10	500	600	200	15,000

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
DSG-S-11	500	600	250	15,800
DSG-S-12	550	700	250	16,500
DSG-S-13	630	750	250	17,000
DSG-S-14	630	900	250	18,000
DSG-S-15	600	1100	250	19,000
DSG-S-16	700	1100	250	20,500
DSG-S-17	800	1200	250	22,000
DSG-S-18	900	1200	250	23,500
DSG-S-19	800	1200	300	25,500
DSG-S-20	900	1200	300	27,500

DENCO

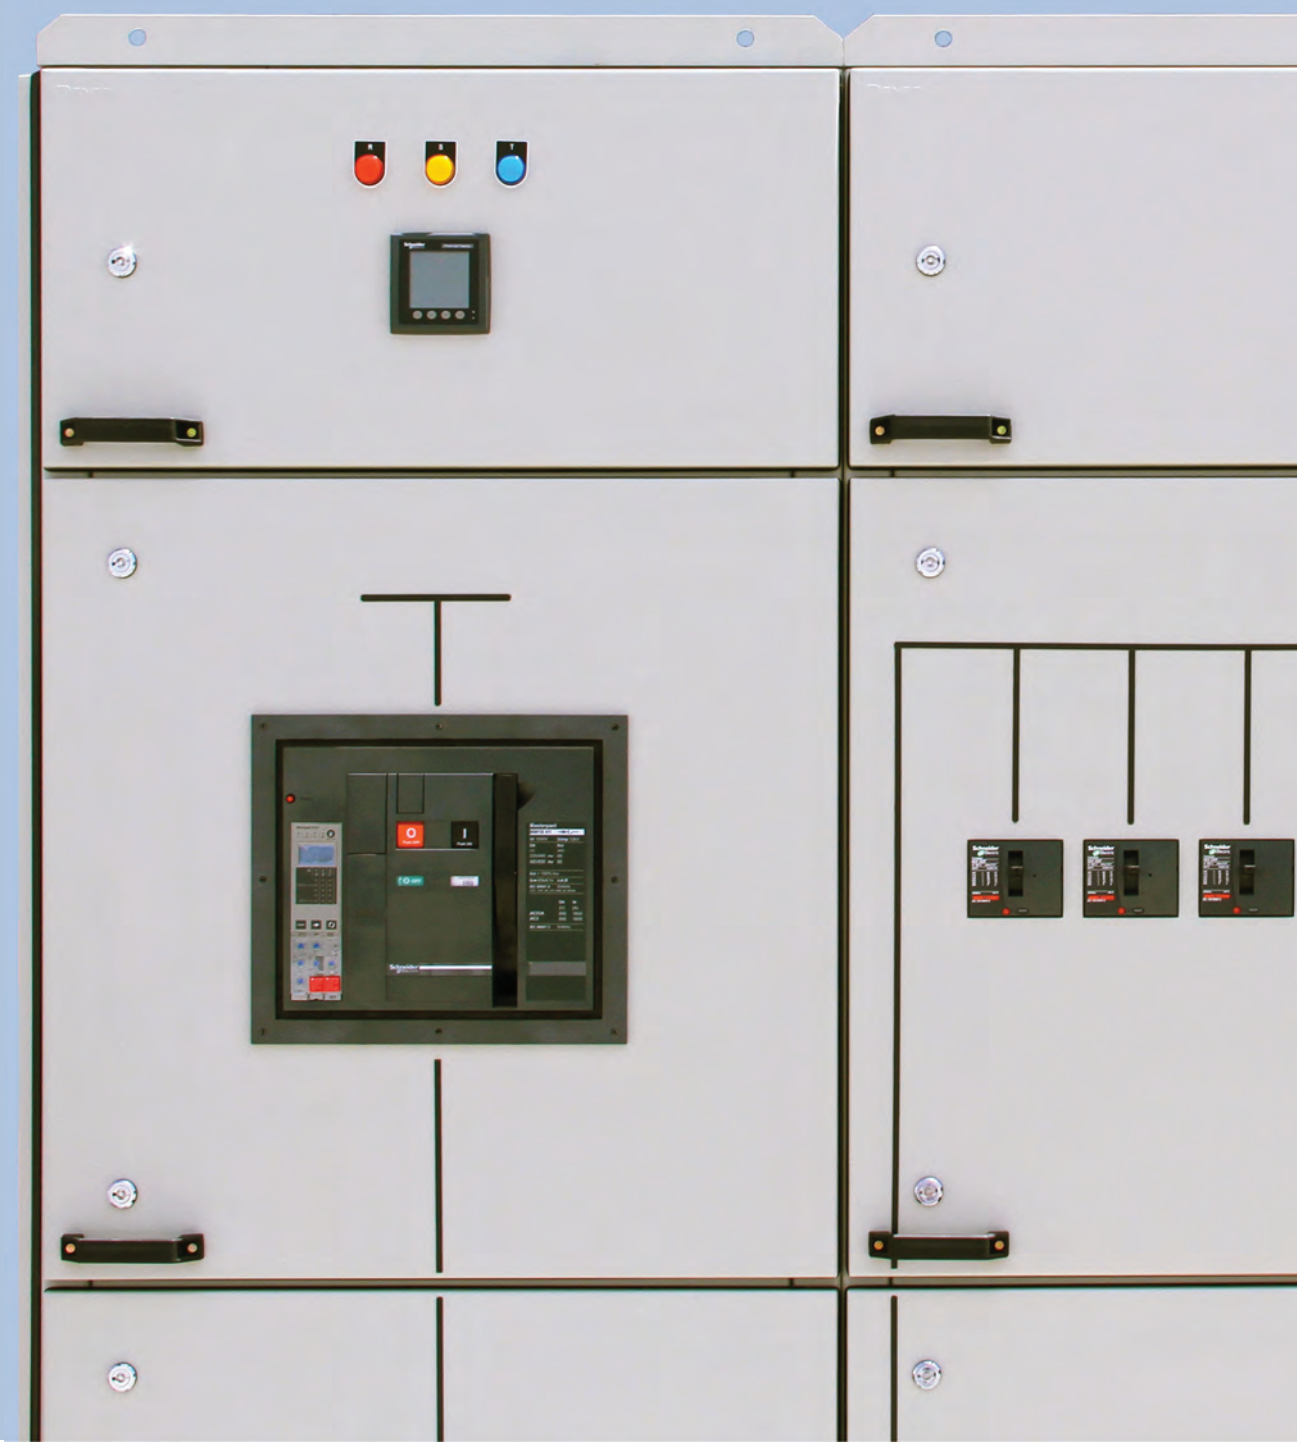

MAIN DISTRIBUTION BOARD

DENCO

DM
MAIN DISTRIBUTION BOARD

Main distribution board (DM) was designed to facilitate customers to simply expand or modify the structures.We provide 24 standard sizes each depend on your demand and requirement.

DM MAIN DISTRIBUTION BOARD

Technical data

+ Mounting plate 1.5 mm.
+ Bracket support provide at the top for movement
+ Top and bottom plate for cable input
+ Ventilation screen in both left and right side
+ Locking system DENCO 59-Lock-02 *(see page 65.)*

Specification

Material	Body and plate : Steel sheet 1.5 mm. Structure : Steel sheet 3.0 mm.
Surface finish	Pre-treatment by zinc phosphate process Power-coated in texture RAL 7032

Major Application



Dust contaminated environments



Controlling waste water treatment system



Main distribution board in the factory



Agricultural machines



Water level controlling



Push button with name plate

Circuit breaker installation

Twist lock system
59-Lock-02 (see page 65)

Ventilation installation
DF 255 (see page 68)

DM MAIN DISTRIBUTION BOARD : SINGLE SECTION

DENCO

IP 40

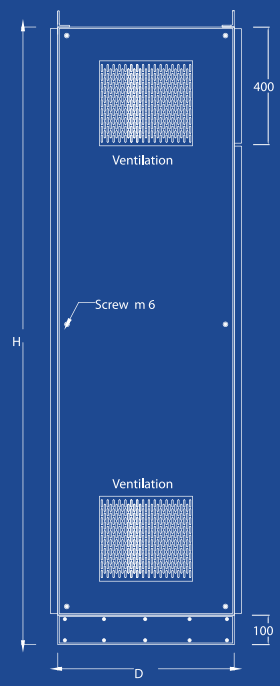

SIDE VIEW

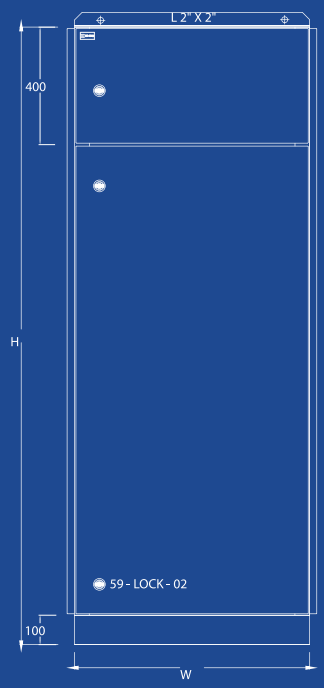

FRONT VIEW

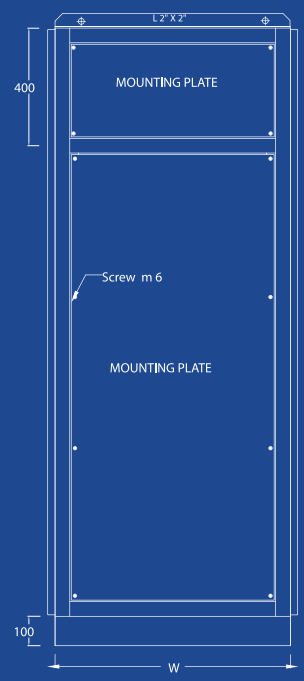

INNERPLATE VIEW

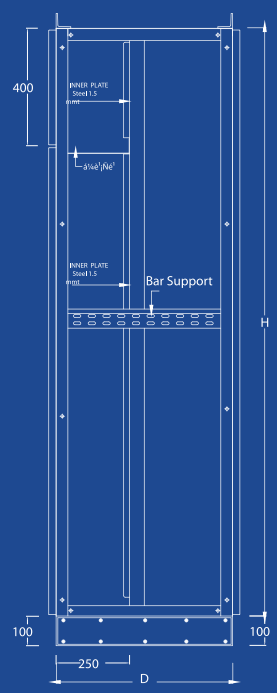

INNER SIDE VIEW



TOP VIEW
1 SECTION



BOTTOM VIEW
1 SECTION

MODEL	WIDTH (mm.)	HEIGHT (mm.)	DEPTH (mm.)	PRICE/UNIT (Baht.)
DM - 01	600	1,800	400	17,000
DM - 02	600	1,800	600	18,000
DM - 03	800	1,800	600	19,000
DM - 04	800	2,100	600	20,500
DM - 05	800	2,100	800	21,500
DM - 06	1,000	2,100	600	23,000
DM - 07	1,000	2,100	800	24,000
DM - 08	1,000	2,100	1,000	25,500

DENCO DM MAIN DISTRIBUTION BOARD : TWO SECTIONS

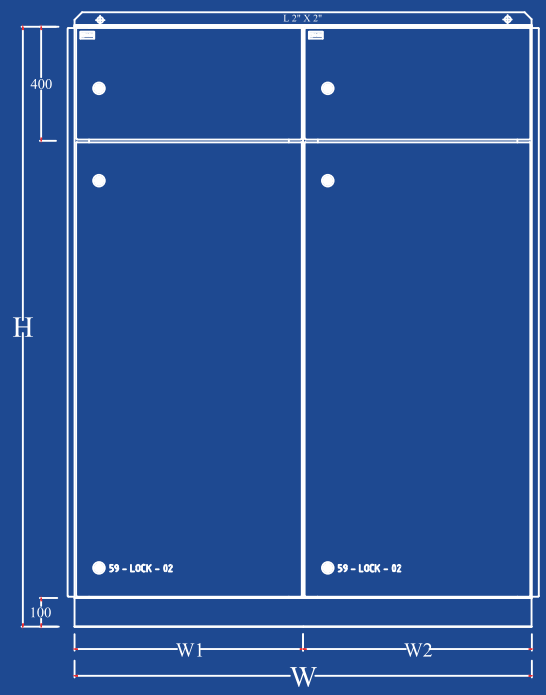

FRONT VIEW

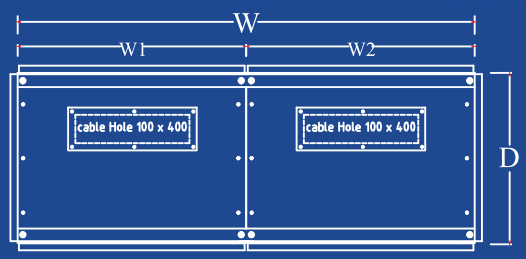

TOP VIEW

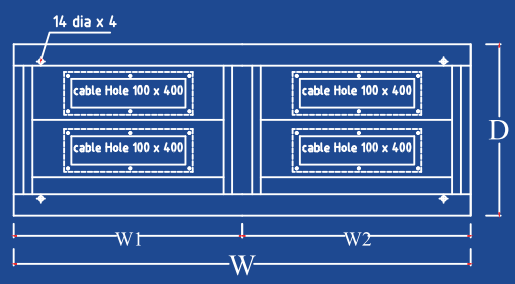

BOTTOM VIEW

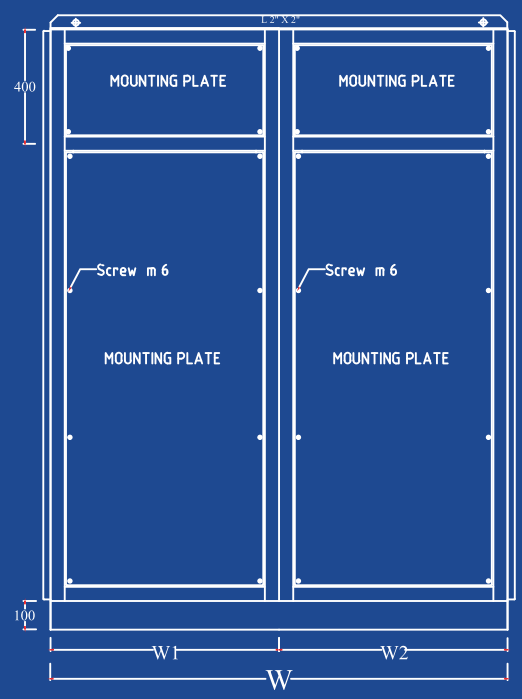

INNER VIEW

MODEL	TOTAL WIDTH (mm.)	HEIGHT (mm.)	DEPTH (mm.)	WIDTH 1 (mm.)	WIDTH 2 (mm.)	PRICE/UNIT (Baht.)
DM - 09	1,200	1,800	400	600	600	33,000
DM - 10	1,200	1,800	600	600	600	35,000
DM - 11	1,600	1,800	600	800	800	37,000
DM - 12	1,600	2,100	600	800	800	40,000
DM - 13	1,600	2,100	800	800	800	42,000
DM - 14	2,000	2,100	600	1,000	1,000	45,000
DM - 15	2,000	2,100	800	1,000	1,000	47,000
DM - 16	2,000	2,100	1,000	1,000	1,000	50,000

DM MAIN DISTRIBUTION BOARD : THREE SECTIONS

DENCO

IP 40

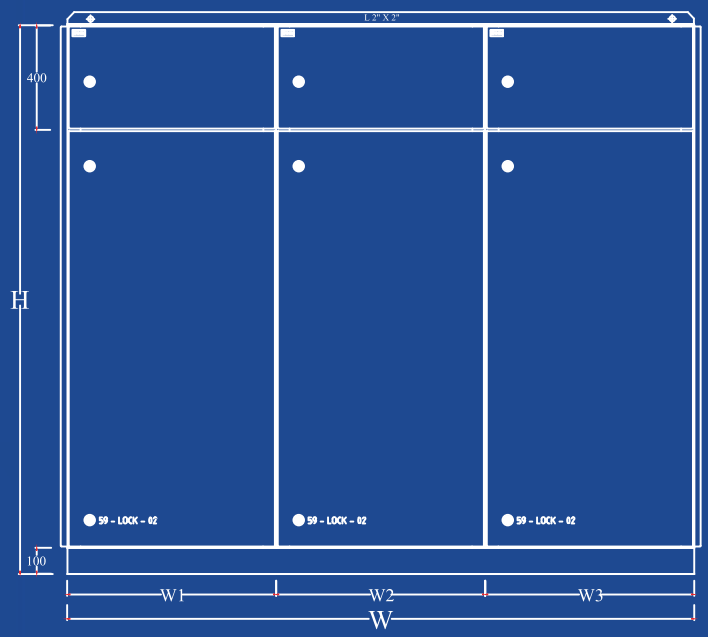

FRONT VIEW

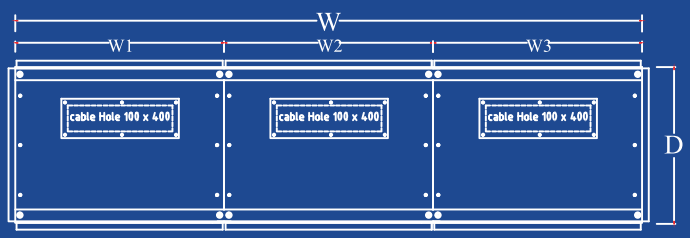

TOP VIEW

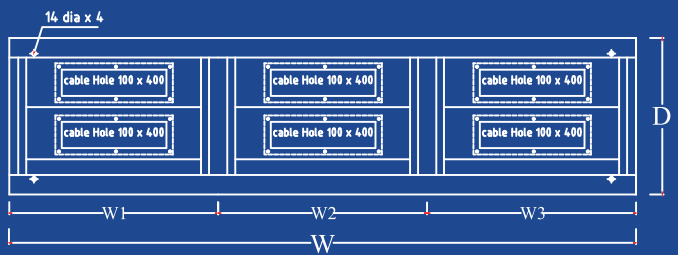

BOTTOM VIEW

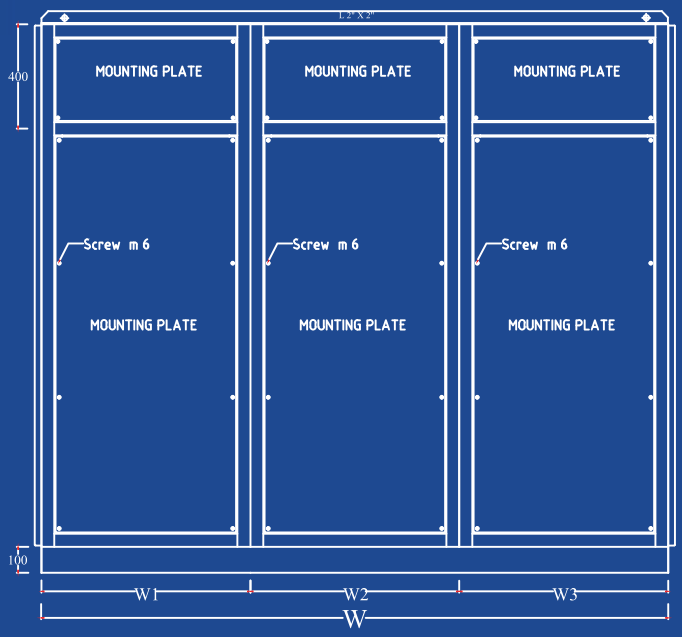

INNER VIEW

MODEL	TOTAL WIDTH (mm.)	HEIGHT (mm.)	DEPTH (mm.)	WIDTH 1 (mm.)	WIDTH 2 (mm.)	WIDTH 3 (mm.)	PRICE/UNIT (Baht.)
DM - 17	1,800	1,800	400	600	600	600	49,000
DM - 18	1,800	1,800	600	600	600	600	52,000
DM - 19	2,400	1,800	600	800	800	800	55,000
DM - 20	2,400	2,100	600	800	800	800	59,500
DM - 21	2,400	2,100	800	800	800	800	62,500
DM - 22	3,000	2,100	600	1,000	1,000	1,000	67,000
DM - 23	3,000	2,100	800	1,000	1,000	1,000	70,000
DM - 24	3,000	2,100	1,000	1,000	1,000	1,000	74,500

DENCO

DENCO

DC : DESK CONSOLE
DP : COMPUTER PANEL
DO: MAIN OUTDOOR TYPE

To satisfy the customers need we provide various types of enclosures which are computer panel (DP), desk console panel (DC) and main distribution board for outdoor type (DO) in various standard sizes.

DC DESK CONSOLE ENCLOSURE

IP 40

Features

"DENCO" Desk console enclosure was designed for controlling machines with easy operation. Top panel was designed in tilting style. It also use widely in controlling CNC machines and telecommunication, especially in LAB, control room and security system.

Technical data

- Internal mounting plate 1.5 mm.
- Fixing earth stud included.
- 2 positions locking system at the front door also at the tile console.
- 50 mm. base height (Steel sheet 2.0 mm.)
- Hydraulic shock absorber for soft closing
- Door sealed with PU gasket
- Locking system DENCO 59-Lock-02

Specification

Material	Steel 1.5 mm. All enclosure
Surface finish	Pre-treatment by zinc phosphate process Power-coated in texture RAL 7032

Major Application



Dust contaminated environments



Trafic controlling

Light house controlling

Dimensions

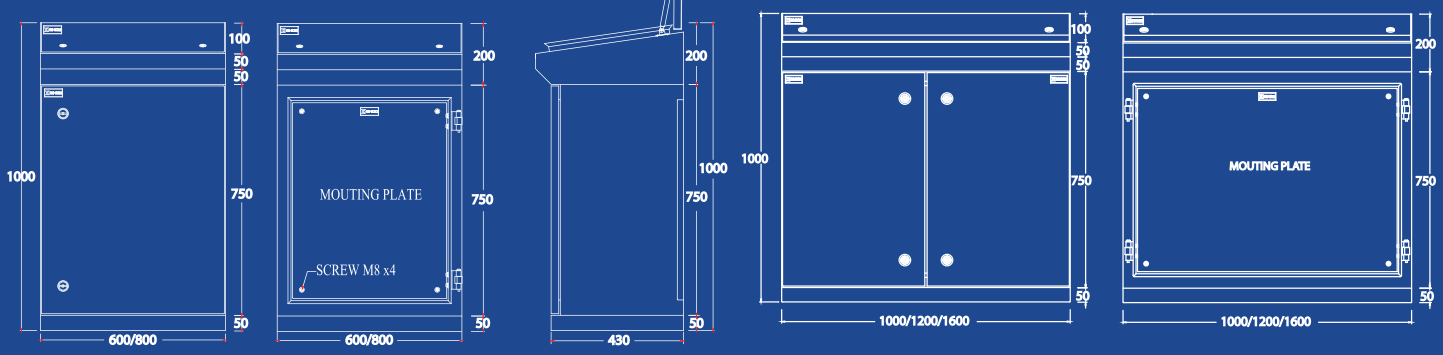

MODEL	WIDTH (mm.)	HEIGHT (mm.)	DEPTH (mm.)	PRICE / UNIT
DC-600	600	1000	430	7,500
DC-800	800	1000	430	8,500
DC-1000	1000	1000	430	10,000
DC-1200	1200	1000	430	12,000
DC-1600	1600	1000	430	20,000

DENCO

IP 40

Features

"DENCO" Computer panel is designed for keeping computer and other equipments such as moitor, keyboard and printer which were used for controlling machines that processing by computerized system and using software application.

This panel was devided into 3 parts.

1.Checking system through monitor.
2.Keyboard drawer which can move in and out.
3.Keeping section for printer

Technical data

+ Viewing window for monitor
+ CPU / Window shelf.
+ 2 breaks castors and 2 without break castor was installed at the base to lock enclosure in place
+ Slide tray for keyboard be able to move in and out
+ Mounting support for light at the roof inside panel
+ 50 mm. base height
+ Locking system DENCO 59-LOCK-02 see page 65

Specification

Material	Body and plate : Steel sheet 1.5 mm. Structure : Steel sheet 2 mm.
Surface finish	Power-coated in texture RAL 7032

Dimensions

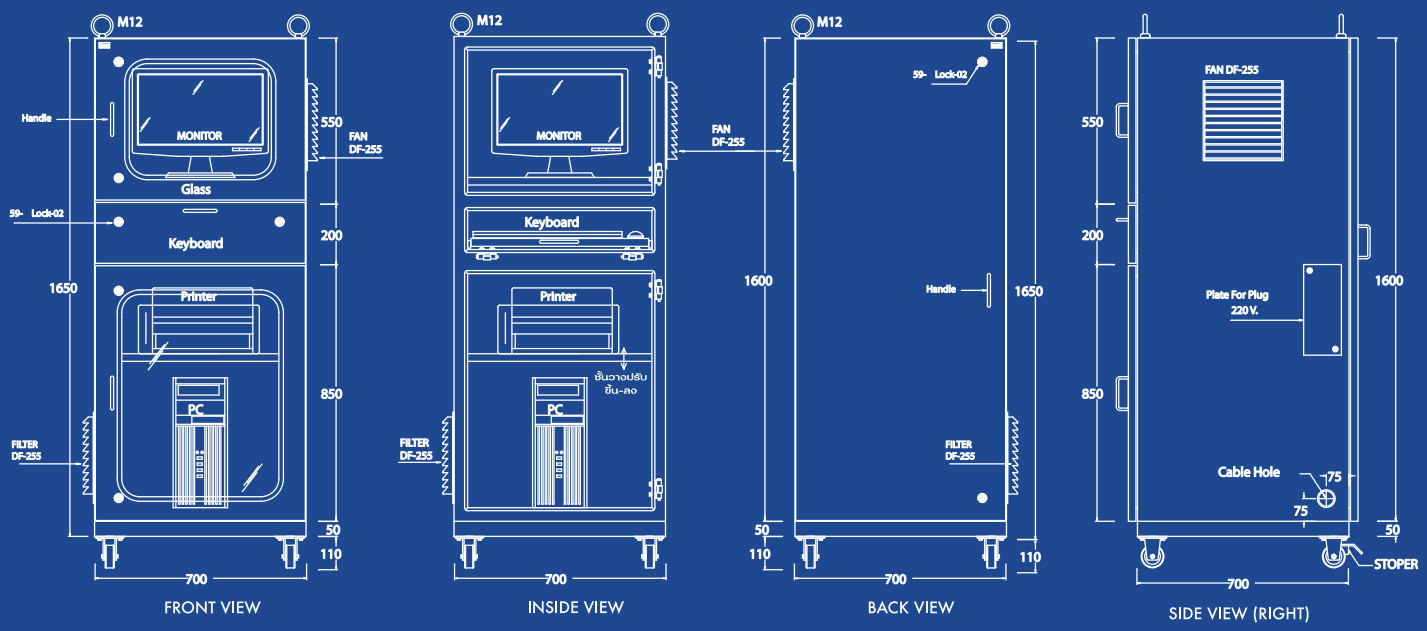

MODEL	WIDTH (mm.)	HEIGHT (mm.)	DEPTH (mm.)	PRICE / UNIT
DP-01	700	1650	700	28,000

DO MAIN DISTRIBUTION BOARD (OUTDOOR TYPE)

Features

"DO" was designed to have high protection for outdoor use and special environments.
"DENCO" provide a special designed for roof tilt to prevent accumulated liquids on the roof and reliable protection systems.
The inner rubber seal is designed to protect water spray from every direction

Specification

Material	Body and plate : Steel sheet 1.5 mm. Structure : Steel sheet 3 mm.
Surface finish	Power-coated in RAL 7032

Technical data

+ Mounting plate 1.5 mm.
+ Eye bolt provide at the top for movement
+ Bottom plate for cable input
+ Pocket strip for wiring plan
+ Swing handle lock DENCO 59-Lock-04 *(see page 65.)*
+ 100 mm. base height

Remark : Locking system can change on request
Other sizes, Cut-outs and drilled holes available on request.

MODEL	WIDTH (mm.)	HEIGHT (mm.)	DEPTH (mm.)	PRICE / UNIT (baht)
DO-01	600	1800	400	22,000
DO-02	600	1800	600	24,000
DO-03	600	1800	800	26,000
DO-04	800	1800	1000	29,000
DO-05	800	2300	400	28,000
DO-06	800	2300	600	30,000
DO-07	800	2300	800	32,000
DO-08	800	2300	1000	34,000

Dimensions

IP 45

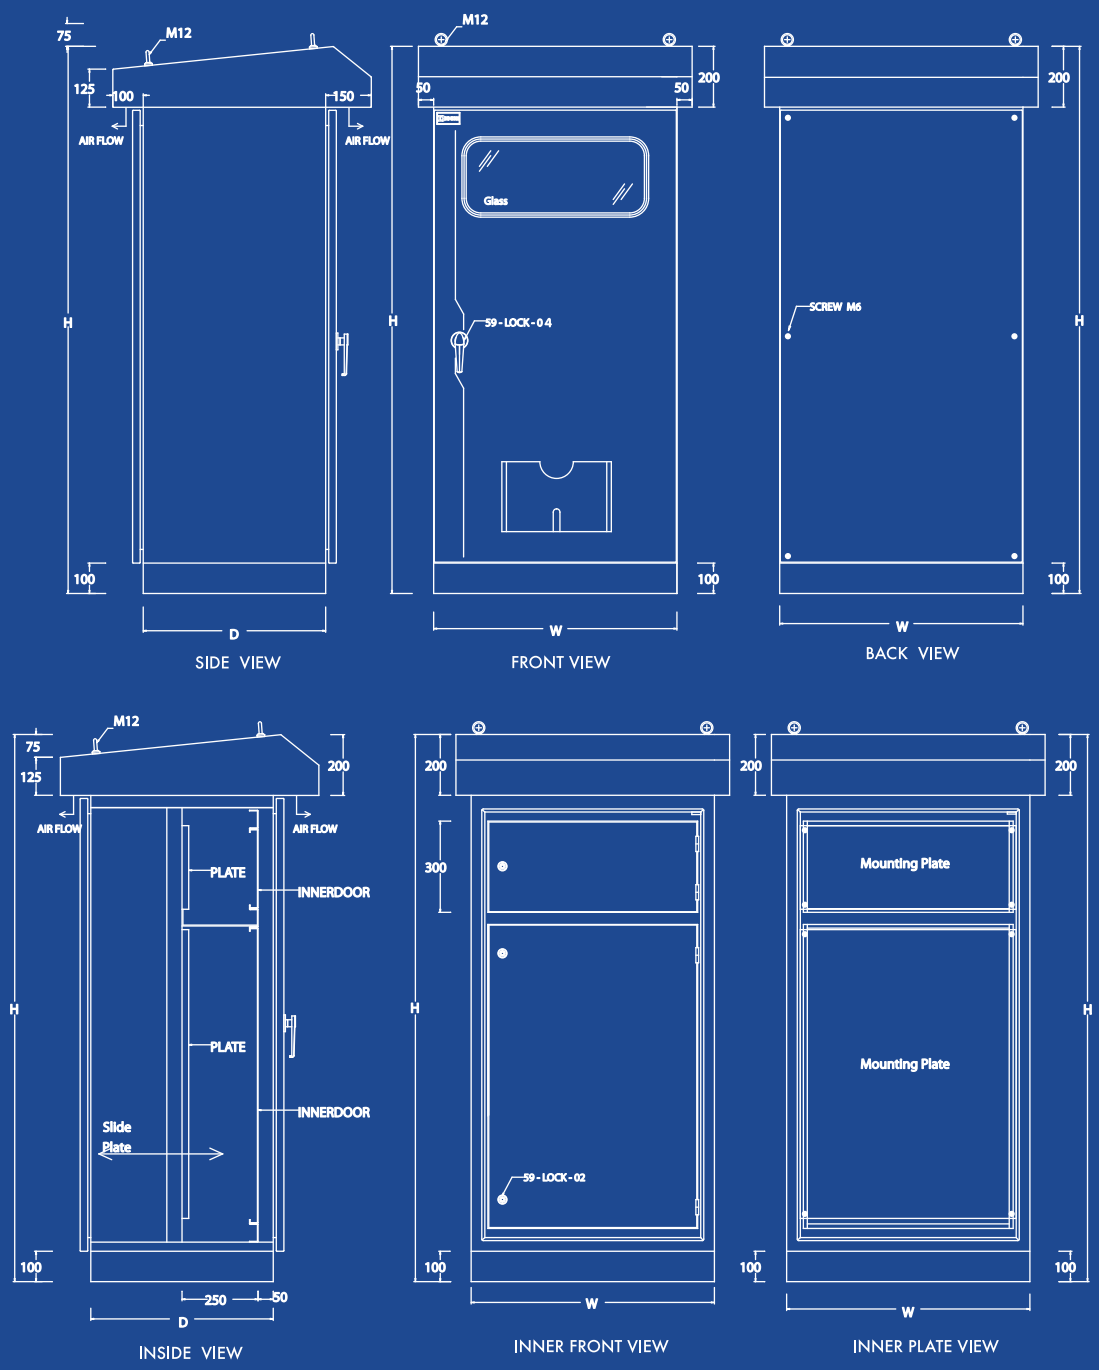

Supply includes

- Water-proof canopy.
- Viewing window at the front door.
- Mounting plate
- Removeable bottom plate (screw lock)
- Pocket strip for wiring plan or manual
- Swing handle lock DENCO 59-Lock-04
- Earth stud included.

Working area

Water spray environment
Telecommunication systems
Electricity and water supply sectors
Pump and motor control systems
Waste water treatment plant

Note :
Material can change upon request, such as electro-gavanized or stanless steel.

DENCO

DENCO

TRUNKING SYSTEM : DW WIRE WAY

DENCO 's wire way is a device to install cables in U - shape tray ordery and safety from the power source. We have developed various type of wire way in different sizes and coating according to usage applications.

DW TRUNKING SYSTEM : WIREWAY

Technical data

+ Connector already included by welding
+ Suitable for indoor installation
+ Cover opening by screw type
+ Suitable for cable and telephone installation system.

Specification

Material	Steel sheet 1.0 mm.
Surface finish	Pre-treatment by zinc phosphate process Power-coated in texture RAL 7032

MODEL	Height (Inch)	Width (Inch)	Price/Unit (Baht)	
			Length 4 Feet (1.2 M.)	Length 8 Feet (2.4 M.)
DW 2X3	2	3	230	380
DW 2X4	2	4	250	450
DW 3X4	3	4	270	480
DW 4X4	4	4	290	510
DW 4X6	4	6	390	670
DW 6X6	6	6	440	820
DW 4X8	4	8	440	820
DW 6X8	6	8	680	1,200
DW 4X10	4	10	680	1,200
DW 6X10	6	10	750	1,400
DW 6X12	6	12	860	1,550
DW 8X12	8	12	950	1,700

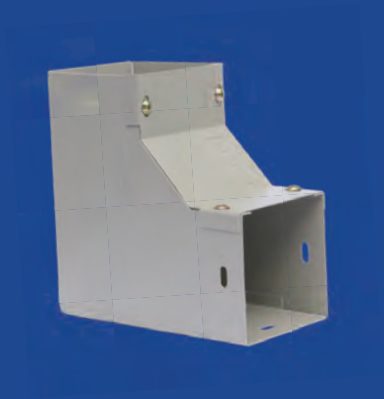

ข้องอเปิดด้านบน

DEU : 90° Elbow top opening

MODEL	PRICE/UNIT
DEU 2X3	230
DEU 2X4	240
DEU 3X4	250
DEU 4X4	270
DEU 4X6	300
DEU 6X6	360
DEU 4X8	360
DEU 6X8	500
DEU 4X10	500
DEU 6X10	600
DEU 6X12	700
DEU 8X12	800

ข้องอเปิดด้านใน

DEI : 90° Elbow inside opening

MODEL	PRICE/UNIT
DEI 2X3	230
DEI 2X4	240
DEI 3X4	250
DEI 4X4	270
DEI 4X6	300
DEI 6X6	360
DEI 4X8	360
DEI 6X8	500
DEI 4X10	500
DEI 6X10	600
DEI 6X12	700
DEI 8X12	800

ข้องอเปิดด้านนอก

DEO : 90° Elbow outside opening

MODEL	PRICE/UNIT
DEO 2X3	230
DEO 2X4	240
DEO 3X4	250
DEO 4X4	270
DEO 4X6	300
DEO 6X6	360
DEO 4X8	360
DEO 6X8	500
DEO 4X10	500
DEO 6X10	600
DEO 6X12	700
DEO 8X12	800

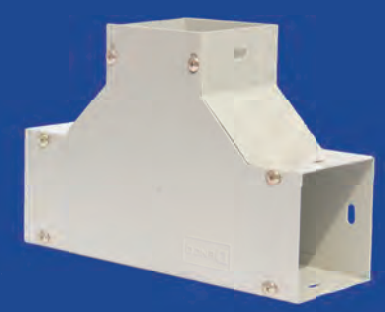



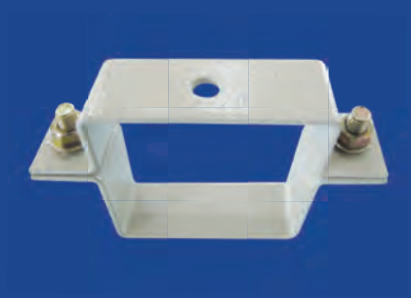

ข้อต่อสามทางเปิดด้านบน

DET : 3 Ways top opening

MODEL	PRICE/UNIT
DET 2X3	290
DET 2X4	320
DET 3X4	350
DET 4X4	370
DET 4X6	390
DET 6X6	450
DET 4X8	450
DET 6X8	600
DET 4X10	600
DET 6X10	650
DET 6X12	750
DET 8X12	900

ข้อต่อสี่ทางเปิดด้านบน

DEX : Horizontal crosses top opening

MODEL	PRICE/UNIT
DEX 2X3	350
DEX 2X4	370
DEX 3X4	420
DEX 4X4	450
DEX 4X6	470
DEX 6X6	600
DEX 4X8	600
DEX 6X8	750
DEX 4X10	750
DEX 6X10	860
DEX 6X12	900
DEX 8X12	1,100

แฮงเกอร์ วายเวย์

DH : Wire Way hanger

MODEL	PRICE/UNIT
DH 2X3	105
DH 2X4	120
DH 3X4	135
DH 4X4	150
DH 4X6	180
DH 6X6	195
DH 4X8	195
DH 6X8	225
DH 4X10	225
DH 6X10	255
DH 6X12	285
DH 8X12	300

DWE TRUNKING SYSTEM : WIREWAY

Technical data
+ Connector already included by welding + Suitable for indoor installation + Cover opening by screw type + Suitable for cable and telephone installation system.

Specification	
Material	Steel sheet 0.7 mm.
Surface finish	Pre-treatment by zinc phosphate process Power-coated in texture RAL 7032

MODEL	Height (Inch)	Width (Inch)	Price/Unit (Bath) Length 8 Feet (2.4 M.)
DW 2X3X8	2	3	320
DW 2X4X8	2	4	390
DW 3X4X8	3	4	420
DW 4X4X8	4	4	450
DW 4X6X8	4	6	570
DW 4X8X8	4	8	720

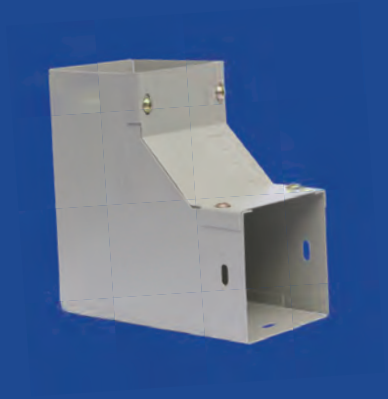

ข้องอเปิดด้านบน

DEUE : 90° Elbow top opening

MODEL	PRICE/UNIT
DEUE 2X3	200
DEUE 2X4	210
DEUE 3X4	230
DEUE 4X4	250
DEUE 4X6	280
DEUE 4X8	340

ข้องอเปิดด้านใน

DEIE : 90° Elbow inside opening

MODEL	PRICE/UNIT
DEIE 2X3	200
DEIE 2X4	210
DEIE 3X4	230
DEIE 4X4	250
DEIE 4X6	280
DEIE 4X8	340

ข้องอเปิดด้านนอก

DEOE : 90° Elbow outside opening

MODEL	PRICE/UNIT
DEOE 2X3	200
DEOE 2X4	210
DEOE 3X4	230
DEOE 4X4	250
DEOE 4X6	280
DEOE 4X8	340



ข้อต่อสามทางเปิดด้านบน

DETE : 3 Ways top opening

MODEL	PRICE/UNIT
DETE 2X3	270
DETE 2X4	300
DETE 3X4	320
DETE 4X4	350
DETE 4X6	370
DETE 4X8	430

แผ่นปิดท้าย วายเวย์

DEPE : End Plate

MODEL	PRICE/UNIT
DEPE 2X3	70
DEPE 2X4	75
DEPE 3X4	90
DEPE 4X4	105
DEPE 4X6	120
DEPE 4X8	150

แฮงเกอร์ วายเวย์

DHE : Wire Way hanger

MODEL	PRICE/UNIT
DHE 2X3	90
DHE 2X4	100
DHE 3X4	115
DHE 4X4	125
DHE 4X6	160
DHE 4X8	175

DENCO

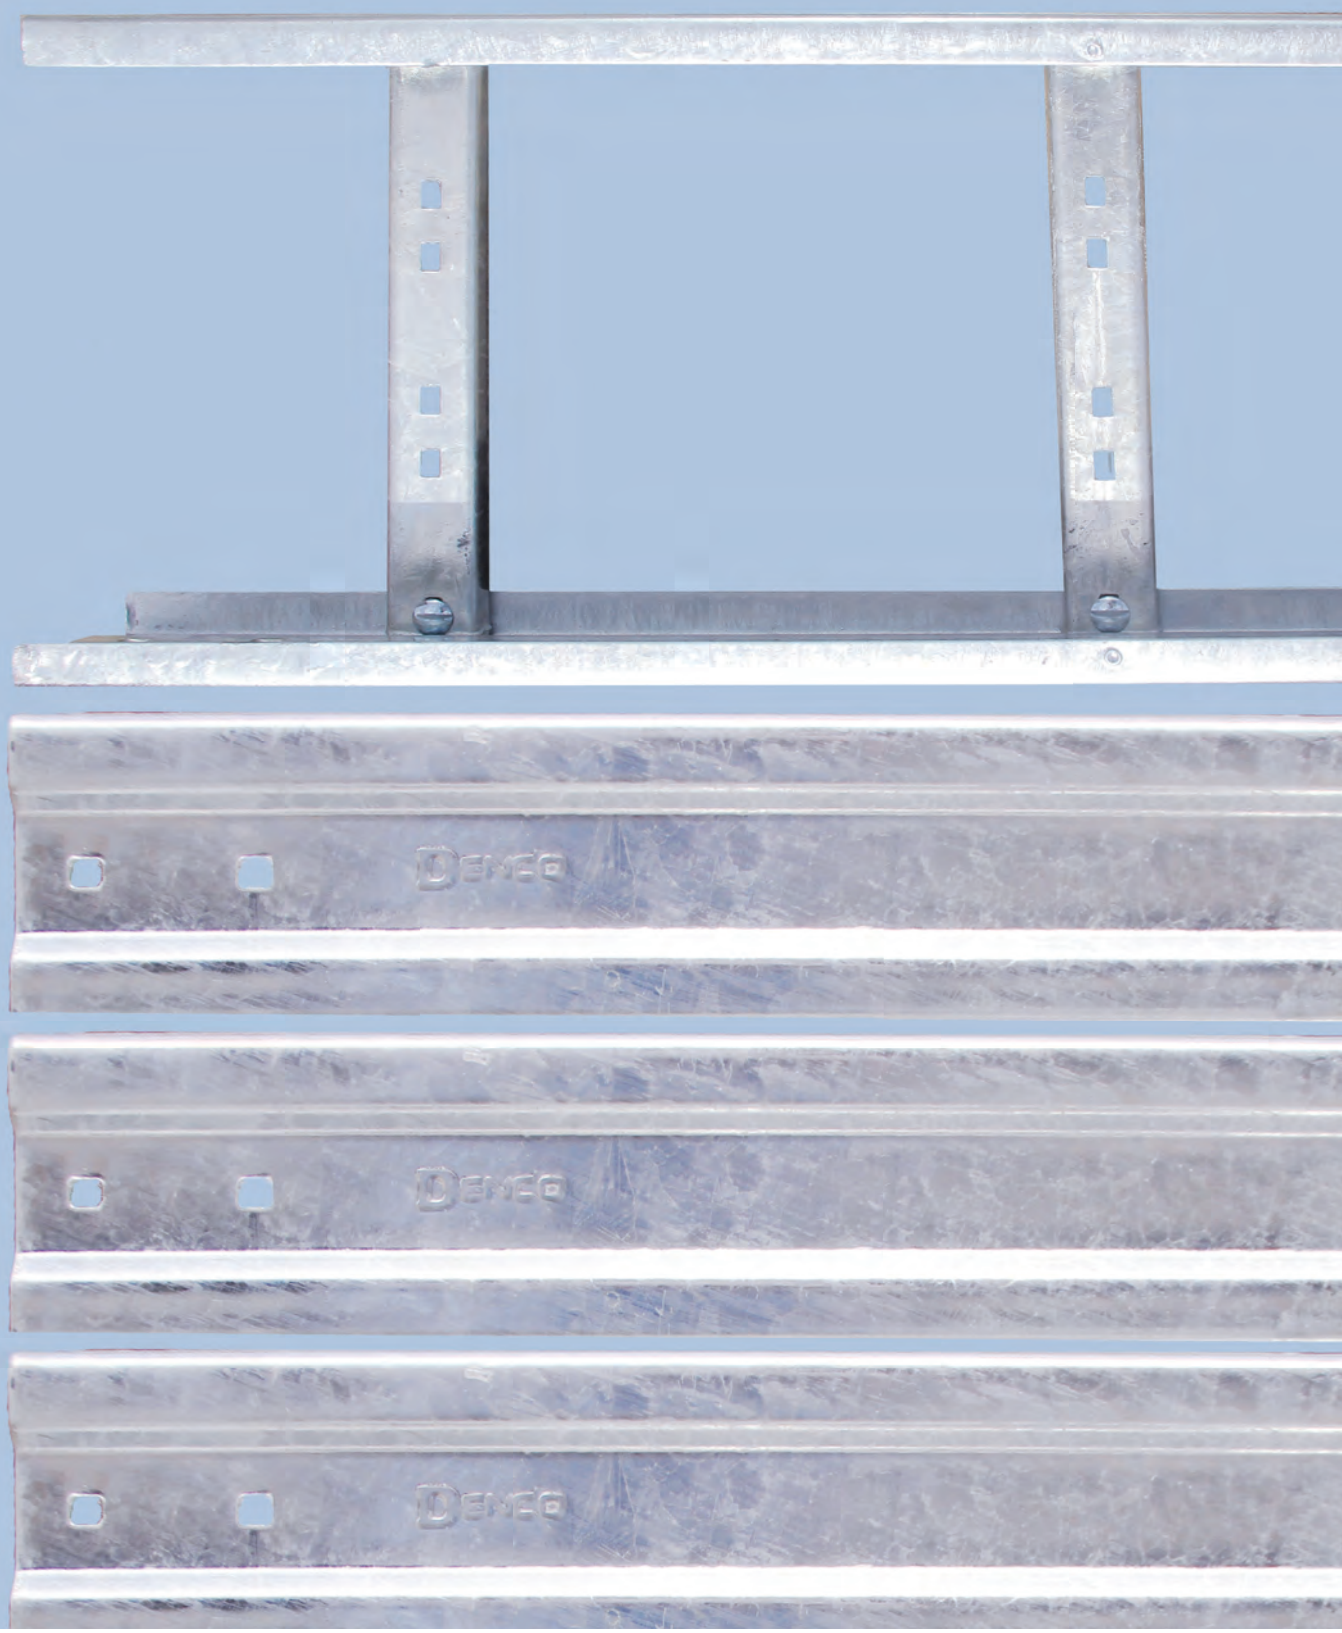

DENCO

TRUNKING SYSTEM : DQR CABLE LADDER

DENCO 's cable ladder is a device to install a lot of cables in U - shape tray. It is suitable for outdoor installation due to hot-dipped galvanized process we used for surface finishing. We have developed various type of cable ladder in different sizes for various usage and applications.

DQR TRUNKING SYSTEM : CABLE LADDER

Technical data
+ 2 main frames in 3 metres long + Assemble with screwing method + Suitable for outdoor installation. + Suitable for low and high voltage cable installation + W-profile curved shape for high durable

Specification	
Material	Steel sheet 2.0 mm.
Surface finish	Hot-Dip gavanized or Power-coated in texture RAL 7032

MODEL	Width (mm.)	Lenght (mm.)	Thickness (mm.)	Price/Unit (Baht)
DQR-200	200	3,000	2	1,200
DQR-300	300	3,000	2	1,425
DQR-400	400	3,000	2	1,650
DQR-500	500	3,000	2	1,950
DQR-600	600	3,000	2	2,175
DQR-700	700	3,000	2	2,400
DQR-800	800	3,000	2	2,550
DQR-900	900	3,000	2	2,850
DQR-1000	1000	3,000	2	3,000

*Remark : Cover can order as optional

DENCO

DQRO
ข้องอแนวดิ่งด้านนอก

Outside vertical Risers

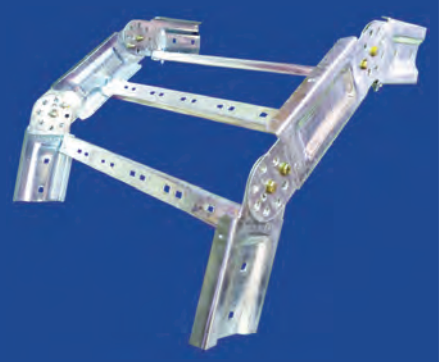

MODEL	WIDTH (mm.)	PRICE / UNIT
DQRO-200	200	500
DQRO-300	300	575
DQRO-400	400	675
DQRO-500	500	750
DQRO-600	600	800
DQRO-700	700	875
DQRO-800	800	950
DQRO-900	900	1,050
DQRO-1000	1,000	1,150

DQRI
ข้องอแนวดิ่งด้านใน

Inside vertical Risers

MODEL	WIDTH (mm.)	PRICE / UNIT
DQRI-200	200	500
DQRI-300	300	575
DQRI-400	400	675
DQRI-500	500	750
DQRI-600	600	800
DQRI-700	700	875
DQRI-800	800	950
DQRI-900	900	1,050
DQRI-1000	1,000	1,150

DQRC
แผ่นปิดท้ายเคเบิ้ลแลดเดอร์

End plate

MODEL	WIDTH (mm.)	PRICE / UNIT
DQRC-200	200	140
DQRC-300	300	180
DQRC-400	400	220
DQRC-500	500	280
DQRC-600	600	325
DQRC-700	700	380
DQRC-800	800	420
DQRC-900	900	500
DQRC-1000	1,000	600

DQRL
ข้องอฉาก

Horizontal 90° elbows

MODEL	WIDTH (mm)	PRICE / UNIT
DQRL-200	200	400
DQRL-300	300	475
DQRL-400	400	550
DQRL-500	500	650
DQRL-600	600	725
DQRL-700	700	800
DQRL-800	800	850
DQRL-900	900	950
DQRL-1000	1,000	1,000

DQRT
ข้อต่อสามทาง

Horizontal Tees

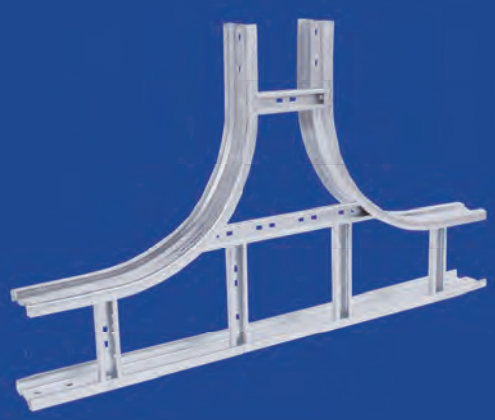

MODEL	WIDTH (mm)	PRICE / UNIT
DQRT-200	200	600
DQRT-300	300	725
DQRT-400	400	825
DQRT-500	500	950
DQRT-600	600	1,075
DQRT-700	700	1,225
DQRT-800	800	1,350
DQRT-900	900	1,450
DQRT-1000	1,000	1,550

DQRX
ข้อต่อสี่ทาง

Horizontal crosses

MODEL	WIDTH (mm)	PRICE / UNIT
DQRX-200	200	800
DQRX-300	300	950
DQRX-400	400	1,100
DQRX-500	500	1,150
DQRX-600	600	1,250
DQRX-700	700	1,350
DQRX-800	800	1,500
DQRX-900	900	1,600
DQRX-1000	1,000	1,800

DENCO

DQRB
แป้นรองรับเคเบิ้ลแลดเดอร์

Brackets support

MODEL	WIDTH (mm)	PRICE / UNIT
DQRB-200	200	200
DQRB-300	300	300
DQRB-400	400	400
DQRB-500	500	500
DQRB-600	600	600
DQRB-700	700	750
DQRB-800	800	900
DQRB-900	900	1,100
DQRB-1000	1,000	1,300

DQRH
แฮงเกอร์เคเบิ้ลแลดเดอร์

Hanger

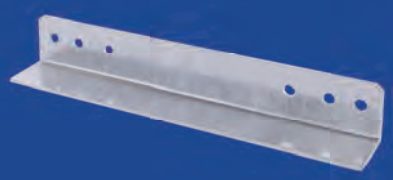

MODEL	WIDTH (mm)	PRICE / UNIT
DQRH-200	200	140
DQRH-300	300	180
DQRH-400	400	220
DQRH-500	500	280
DQRH-600	600	325
DQRH-700	700	380
DQRH-800	800	420
DQRH-900	900	500
DQRH-1000	1,000	600

DQRG
ข้อต่อตรง



70.-

DQRU
ข้อต่อลงตู้



75.-

DQRE
ข้อต่อโยคคอม้า

280.-

DQRF
ข้อต่อขึ้นลง

250.-

DQRK
ประกับยึดข้าง

150.-

DQRD
แผ่นกั้นกลาง

150.-/M

DQRR
ข้อต่อลดด้านกว้าง

120.-

DQRS
แคล้มป์แลดเดอร์

40.-

DQRL
ข้อต่อปรับซ้ายขวา



250.-

DQRJ
เจล็อคแลดเดอร์

85.-

DENCO

DENCO

TRUNKING SYSTEM : DSR CABLE TRAY

DENCO 's cable tray is a device to install a lot of cables in U - shape tray. It is suitable for indoor installation. We have developed various type of cable tray in different sizes to fit with many usage and applications.

DSR TRUNKING SYSTEM : CABLE TRAY

Technical data
+ 2 main frames in 2.4 metres long + Welding assembly + Suitable for indoor installation + Suitable for low and high voltage cable installation + 150 degree plate formed for high durable

Specification	
Material	Steel sheet 1.5 mm.
Surface finish	Power-coated in texture RAL 7032 Hot-Dip galvanized is available on request

MODEL	Width (mm.)	Lenght (mm.)	Thickness (mm.)	Price/Unit (Baht)
DSR-200	200	2,400	1.5	720
DSR-300	300	2,400	1.5	960
DSR-400	400	2,400	1.5	1,200
DSR-500	500	2,400	1.5	1,440
DSR-600	600	2,400	1.5	1,680
DSR-700	700	2,400	1.5	2,328
DSR-800	800	2,400	1.5	2,568
DSR-900	900	2,400	1.5	2,808
DSR-1000	1000	2,400	1.5	3,168

*Remark : Cover can order as optional

DENCO

DSRO
ข้องอแนวดิ่งด้านนอกเทรย์

Outside vertical Risers

MODEL	WIDTH (mm)	PRICE / UNIT
DSRO-200	200	370
DSRO-300	300	440
DSRO-400	400	500
DSRO-500	500	570
DSRO-600	600	630
DSRO-700	700	690
DSRO-800	800	750
DSRO-900	900	820
DSRO-1000	1,000	870

DSRI
ข้องอแนวดิ่งด้านในเทรย์

Inside vertical Risers

MODEL	WIDTH (mm)	PRICE / UNIT
DSRI-200	200	370
DSRI-300	300	440
DSRI-400	400	500
DSRI-500	500	570
DSRI-600	600	630
DSRI-700	700	690
DSRI-800	800	750
DSRI-900	900	820
DSRI-1000	1,000	870

DSRC
แผ่นปิดท้ายเคเบิ้ลเทรย์

End plate

MODEL	WIDTH (mm)	PRICE / UNIT
DSRC-200	200	110
DSRC-300	300	130
DSRC-400	400	150
DSRC-500	500	170
DSRC-600	600	190
DSRC-700	700	210
DSRC-800	800	230
DSRC-900	900	250
DSRC-1000	1,000	270

DSRL
ข้องอฉากเทรย์

Horizontal 90° elbows

MODEL	WIDTH (mm.)	PRICE / UNIT
DSRL-200	200	440
DSRL-300	300	570
DSRL-400	400	690
DSRL-500	500	810
DSRL-600	600	940
DSRL-700	700	1,070
DSRL-800	800	1,190
DSRL-900	900	1,320
DSRL-1000	1,000	1,440

DSRT
ข้อต่อสามทางเทรย์

Horizontal Tees

MODEL	WIDTH (mm.)	PRICE / UNIT
DSRT-200	200	570
DSRT-300	300	690
DSRT-400	400	810
DSRT-500	500	940
DSRT-600	600	1,070
DSRT-700	700	1,190
DSRT-800	800	1,320
DSRT-900	900	1,440
DSRT-1000	1,000	1,570

DSRX
ข้อต่อสี่ทางเทรย์

Horizontal crosses

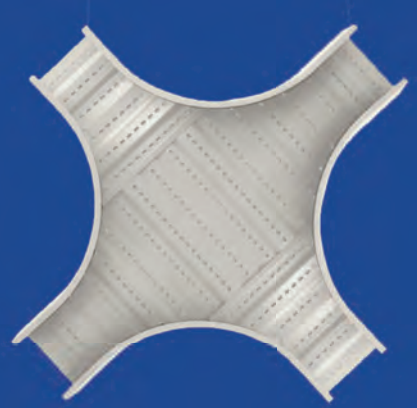

MODEL	WIDTH (mm.)	PRICE / UNIT
DSRX-200	200	690
DSRX-300	300	820
DSRX-400	400	940
DSRX-500	500	1,070
DSRX-600	600	1,190
DSRX-700	700	1,320
DSRX-800	800	1,440
DSRX-900	900	1,570
DSRX-1000	1,000	1,690

DENCO

DSRB
แป้นรองรับเคเบิ้ลเทรย์

Brackets support

MODEL	WIDTH (mm.)	PRICE / UNIT
DSRB-200	200	200
DSRB-300	300	300
DSRB-400	400	400
DSRB-500	500	500
DSRB-600	600	600
DSRB-700	700	750
DSRB-800	800	900
DSRB-900	900	1,100
DSRB-1000	1,000	1,300

DSRH
แฮงเกอร์เคเบิ้ลเทรย์

Hanger

MODEL	WIDTH (mm.)	PRICE / UNIT
DSRH-200	200	140
DSRH-300	300	180
DSRH-400	400	220
DSRH-500	500	280
DSRH-600	600	325
DSRH-700	700	380
DSRH-800	800	420
DSRH-900	900	500
DSRH-1000	1,000	600

DSRG
ข้อต่อตรง

70.-

DSRF
ข้อต่อโยกขึ้นลง

250.-

DSRE
ข้อต่อโยคคอม้า

280.-

DSRU
ข้อต่อลงตู้

75.-

DSRK
ประกับยึดข้าง

50.-

DSRS
แคล้มป์เทรย์

40.-

DSRR
ข้อต่อลดด้านกว้าง

120.-

DSRL
ข้อต่อปรับซ้ายขวา

250.-

DENCO

DENCO

DCSP
DENCO SOLAR PUMP

Denco support to use clean energy from nature. We developed our device called "Denco solar pump". It suitable for agriculture in both large and small scale. It is ready to use at any place even in remote area.

DCSP : SOLAR PUMP

DCSP 0124-300W-P25
(mobile type)

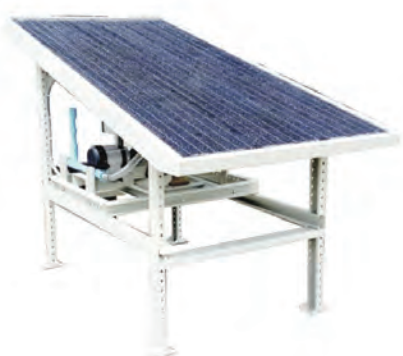

DCSP 0124-300W-P25
(fix type)

MODEL	Price/set (Baht)
DCSP 0124-300W-P25 (fix type)	**55,000**
DCSP 0124-300W-P25 (mobile type)	**60,000**

Description

เครื่องสูบน้ำพลังงานแสงอาทิตย์เดนโก้รุ่น DCSP0214-300W-P25เป็นเครื่องสูบน้ำที่ไม่ต้องใช้แบตเตอรี่และไฟฟ้าในการทำงาน ใช้เพียงพลังงานจากโซล่าร์เซลล์แผงเดียวก็สามารถสูบน้ำขึ้นมาใช้ได้ทันที เหมาะสำหรับเกษตรกรที่อยู่ในพื้นที่ห่างไกลระบบไฟฟ้ายังเข้าไปไม่ถึง รวมถึงระบบเกษตรกรรมที่ต้องการประหยัดพลังงานไฟฟ้าหรือน้ำมันเชื้อเพลิงในการทำงาน นอกจากนี้เครื่องสูบน้ำเดนโก้ยังช่วยลดค่าใช้จ่ายในการซ่อมแซมบำรุงรักษาเครื่องยนต์ และยังช่วยลดมลภาวะจากควันของเครื่องยนต์อีกด้วย

เครื่องสูบน้ำพลังงานแสงอาทิตย์เดนโก้ ได้ผ่านการค้นคว้าทดลองและทดสอบเครื่องในสภาพการใช้งานจริงเพื่อพัฒนารูปแบบให้เหมาะสมกับแสงแดดในทุกพื้นที่ของประเทศไทยและให้เกิดประสิทธิภาพสูงสุด เป็นเครื่องประกอบสำเร็จรูปจากโรงงานพร้อมใช้งานได้ทันที เพียงนำไปวางข้างบ่อน้ำให้อยู่ในตำแหน่งที่มีแสงแดดส่องตรงมาถึงแผงโซล่าร์เซลล์แล้วต่อท่อสูบไปยังแหล่งน้ำก็สามารถเปิดสวิทช์สูบน้ำขึ้นมาใช้ได้เลย โดยไม่ต้องมีการปรับแต่งอุปกรณ์ใด ๆ เพราะเป็นระบบควบคุมอัตโนมัติ จะเริ่มทำงานทันทีเมื่อมีแสงแดด

เครื่องสูบน้ำพลังงานแสงอาทิตย์เดนโก้ เป็นเครื่องที่ใช้งานง่าย สะดวกและไม่ยุ่งยากซับซ้อน สามารถดูแลรักษาแบบง่าย ๆ ด้วยตนเอง เพียงหมั่นเช็ดทำความสะอาดกระจกของแผงโซล่าร์เซลล์อยู่เสมอ นอกจากจะเป็นการยืดอายุการใช้งานของเครื่องแล้ว ยังเป็นการเพิ่มประสิทธิภาพในการรับแสงแดดให้ได้พลังงานสูงสุดอีกด้วย

เครื่องสูบน้ำพลังงานแสงอาทิตย์เดนโก้ มีให้เลือก 2 รุ่นด้วยกันคือแบบ Fix type เป็นเครื่องที่ต้องการตั้งอยู่ในที่เดิมประจำไม่ต้องการเคลื่อนย้าย และรุ่น Mobile type เป็นรุ่นที่มีล้อสามารถเคลื่อนย้ายได้สะดวก

Major Application

Farming | Animal husbandry | Fish farming | Controll water level in factory | Agricultural

Specification	
Material	3.0 mm. steel
Surface finish	Power-coated in RAL 7032 with UV protection
Electrical	DENCO-PDCS (DENCO direct current system)
Control	24 VAC. All power and control wire cable are water proof (IP45)
Solar panel	Monocrystalline DENCO CUSTOM solar module DCPV-M300W 300 watts.
Driven motor	DENCO Custom made BLDC Motor 300 watts. 24 V.DC.
Transmission	Direct driven with coulping joint
Speed reducer	Sun gear reducer box to working speed 500 rpm.

Specification	
Water pump	DENCO modify POSITION PUMP
Suction/Outlet	25 mm. Suction dept. 8.0 mm. Transfer distance 150 m. Water was pulled from ground to storage tank 12m.
Flow rate	1000 - 1200 liters / min (according to sunlight)
Daily water supply	10 to 15 cu m. (according to sunlight)
Pressure	Working pressure 2.0 - 4.0 bars

DENCO

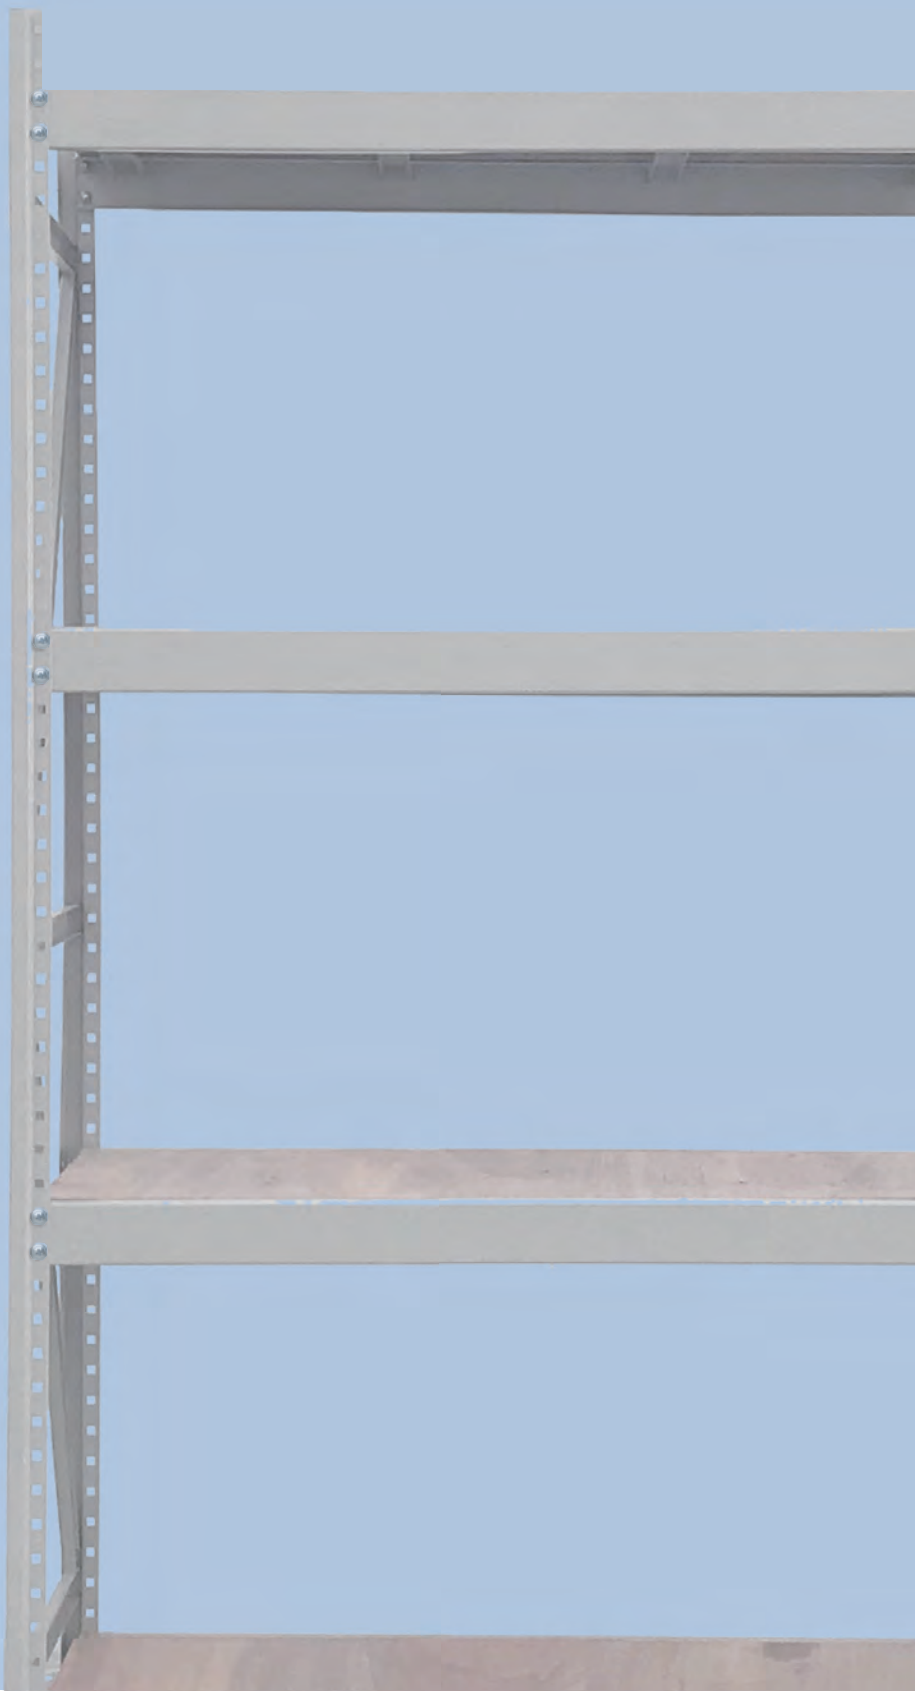

DENCO

D-CASE SHELF

D-CASE is suitable for warehouses or factories to keep any products and materials for production. It is underneath, strength and easy to install or adjust.

Technical data



- (A.)10 mmt. plywood for each shelf decking. 250 kg. load per shelf
- (B.) Beam shelf assembly with bolt and nut
- (C.) Main column welded for high durable

D-CASE SHELF

Dimentions

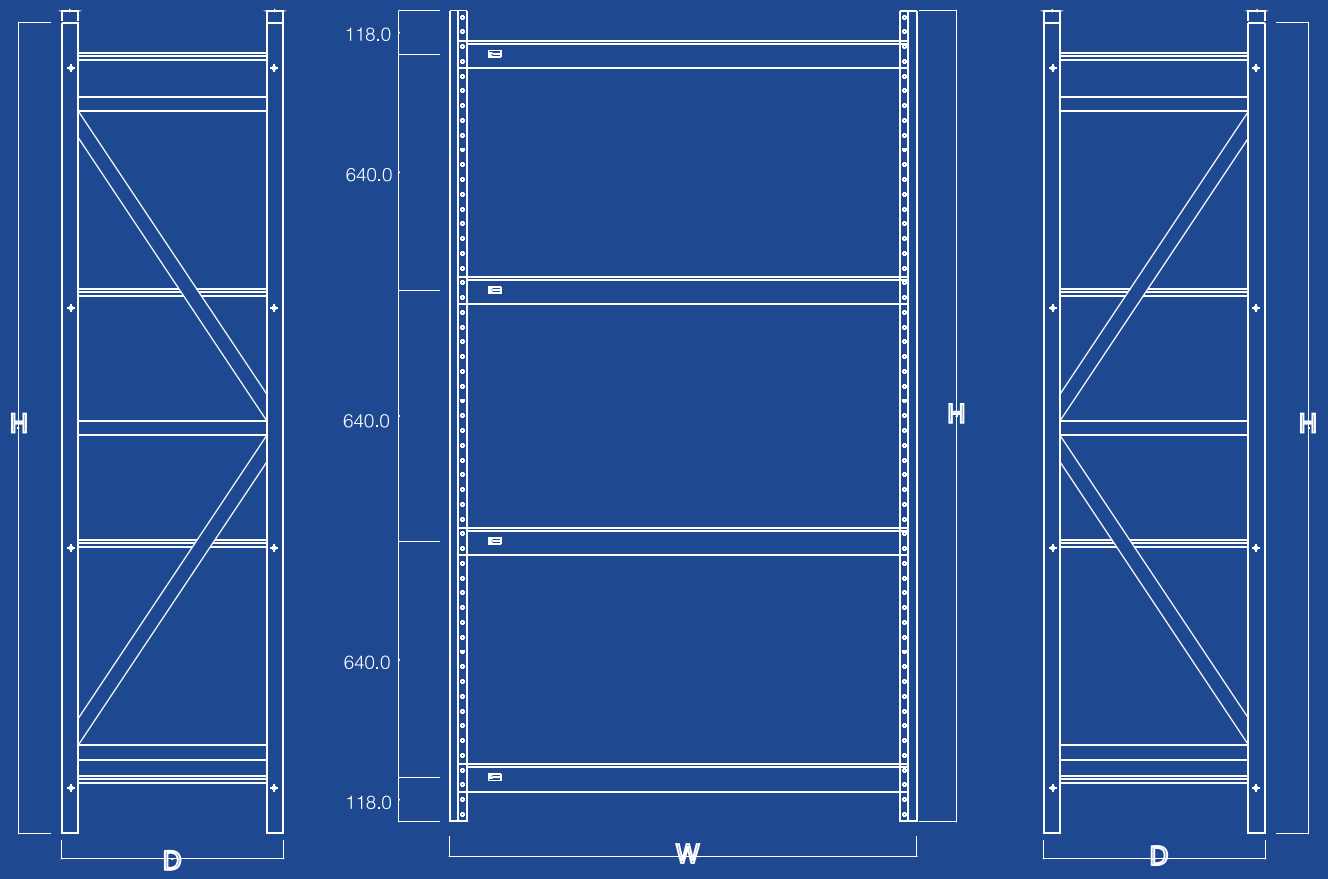

SIDE VIEW (LEFT) | FRONT VIEW | SIDE VIEW (RIGHT)

Supply included

- 2 pcs. main column
- 8 pcs. beam shelves
- 3 pcs. support under each decking
- 32 pcs. M8 cap screw
- 4 pcs. plywood decking

Specification

Material



- Steel sheet 2.0 mm.
- Decking
  - Steel 2.0 mm thick
  - Plywwood 10.0 mm thick

Surface finish

- Pre-treatment by zinc phosphate process
- Powder-coated in texture RAL 7032

Load capacity

250 kg

250 kg./ tray for plywood decking

Plywood decking

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Baht)
WOOD SHELF D-CASE	1,265	2,200	600	9,500

DENCO

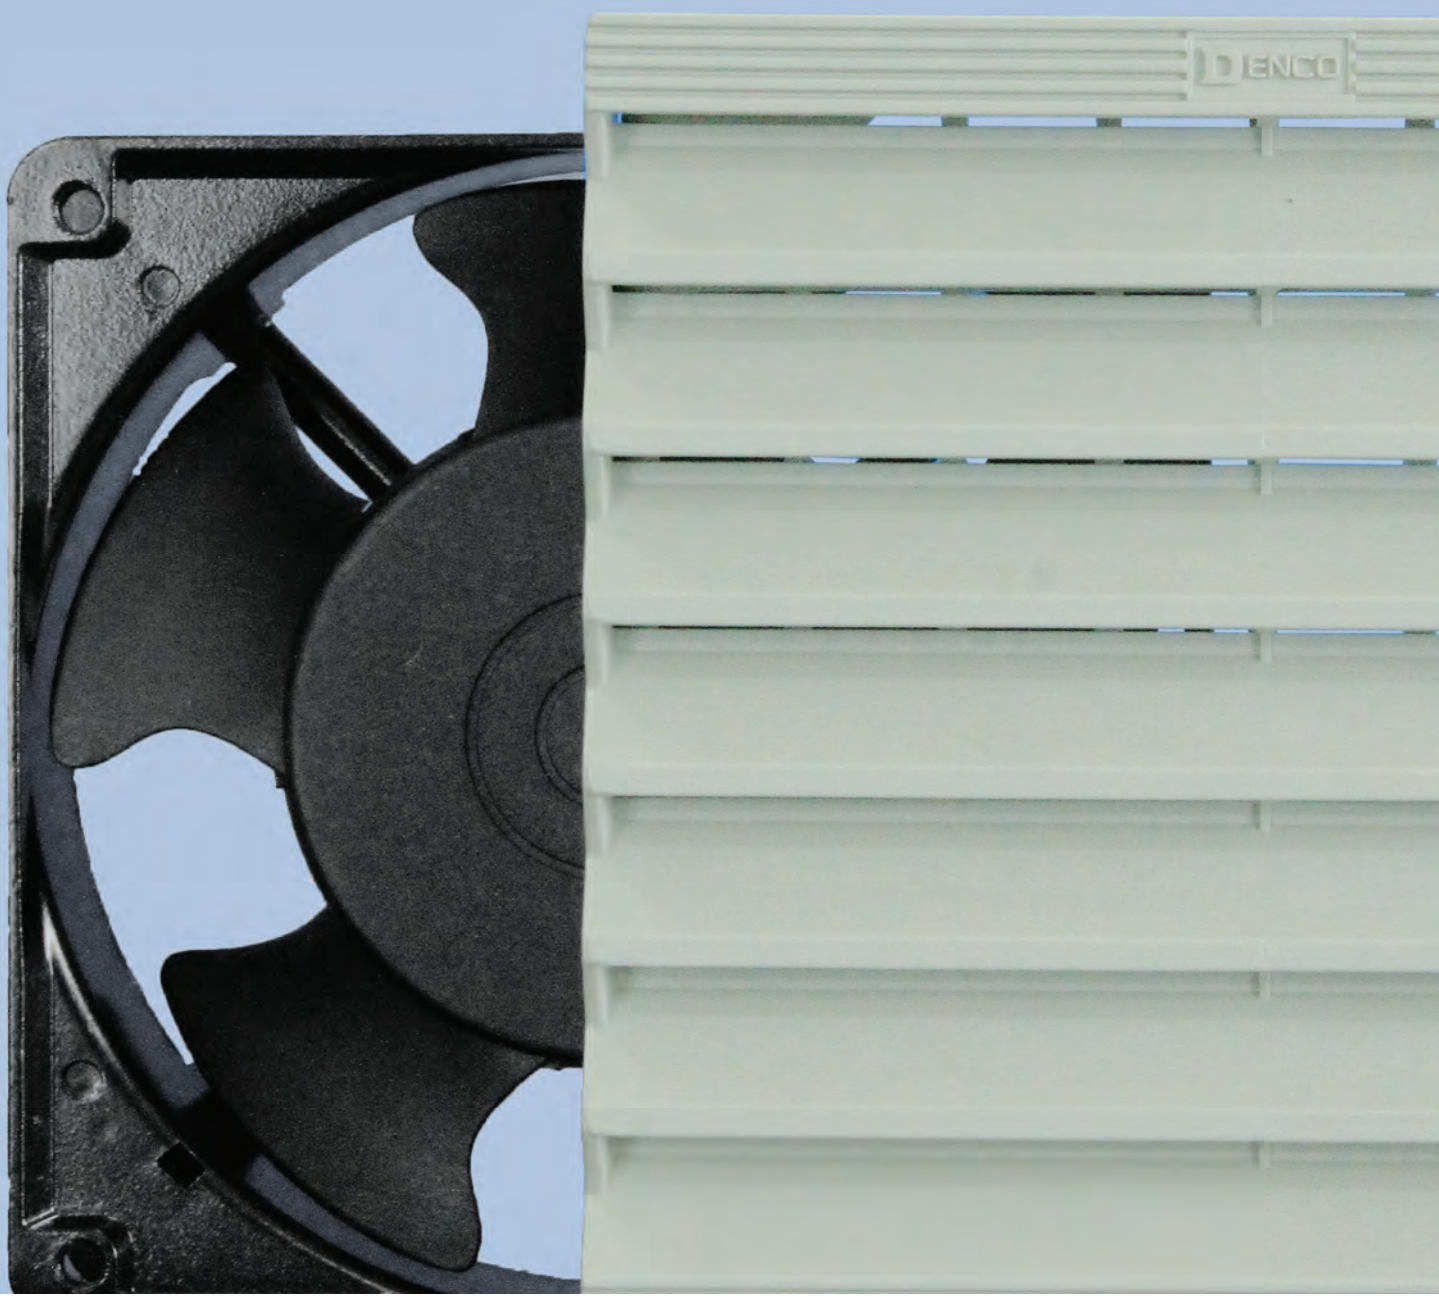

DENCO
ACCESSORIES

Other from our after sale service we also provide neccessary accessories for usage or mantanance with our products easily to extent our products life time.

Acccessories
for switchboard

01

กุญแจกด DA
PUSH LOCK
รุ่น 59-LOCK 01
80 Baht.

02

กุญแจกลม
TWIST LOCK
รุ่น 59-LOCK 02
110 Baht.

03

กุญแจเขาควาย
SWING HANDLE LOCK
รุ่น 59-LOCK 03
180 Baht.

04

กุญแจเขาควายกันน้ำ
SWING HANDLE LOCK
รุ่น 59-LOCK 04
300 Baht.

05

กุญแจคอนโทรล
SWING HANDLE LOCK
รุ่น 59-LOCK 05
900 Baht.

06

กุญแจคอนโทรลสีเงิน
SWING HANDLE LOCK
รุ่น 59-LOCK 06
900 Baht.

07

กุญแจคอนโทรลเล็ก
SWING HANDLE LOCK
รุ่น 59-LOCK 07
200 Baht.

08

กุญแจกดตู้ DA-S
SILVER LOCK
รุ่น 59-LOCK 08
350 Baht.

09

กุญแจสมอเรือ
TURN LOCK
รุ่น 59-LOCK 09
80 Baht.

10

กุญแจหูกระเป๋าเล็ก
GRIP LOCK
รุ่น 59-LOCK 10
80 Baht.

11

กุญแจหูกระเป๋าใหญ่
GRIP LOCK
รุ่น 59-LOCK 11
180 Baht.

12

กุญแจหูกระเป๋าติดสปริง
GRIP LOCK
รุ่น 59-LOCK 12
500 Baht.

13

กุญแจดอกสั้น
TWIST KEY
รุ่น 59-LOCK 21
30 Baht.

14

กุญแจดอกยาว
TWIST KEY
รุ่น 59-LOCK 22
50 Baht.

15

ชุดสกรูสำหรับ
ข้อต่อแลดเดอร์
8 Baht./ ชุด

16

ชุดสกรูสำหรับ
ข้อต่อวายเวย์
6 Baht./ ชุด



17

ยางกระจก DSG 01-13
FOR VIEWING WINDOW OF DSG 01-13
30.- / m.

18

ยางกระจก DSG 14-20
FOR VIEWING WINDOW OF DSG 14–20
40.- / m.

19

ยางขอบฝา DM
RUBBER SEAL FOR DM
30.- / m.



20

ยางฟองน้ำ 6 มม.
RUBBER SPONGE 6 mm.
50.- / m.



21

ยางฟองน้ำ 3 มม.
RUBBER SPONGE 3 mm.
40.- / m.



22

ยางขอบตู้ DO/LP
RUBBER SEAL FOR DO/LP
80.- / m.

23

ยางขอบตู้ DA/DS
RUBBER SEAL FOR DA/DS
40.- / m.

24

สีเสปรย์ สีครีม
DENCO #7032
180 Baht.

25

สีเสปรย์ สีเทาอ่อน
DENCO #7035
180 Baht.

26

สีเสปรย์ สีเทา
DENCO #7040
180 Baht.

27

ชุดหลอดไฟสำหรับติดในตู้คอนโทรล
พร้อมลิมิทสวิทช์ 10 watt
1200 Baht.

28

ฝาครอบพัดลมใหญ่
600 Baht.

29

ฝาครอบพัดลมเล็ก
500 Baht.

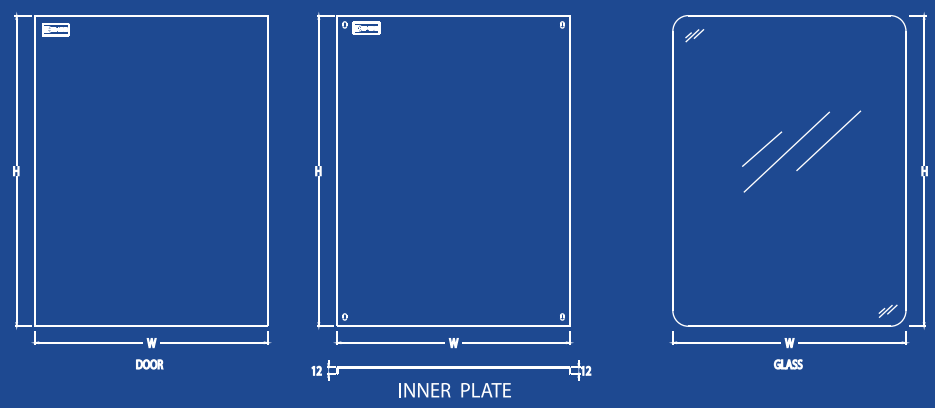

PRICE/UNIT (Bath)							
MODEL	ประตู DA	เพลท DA	ประตู DS/DSG	เพลท DS	เพลท DSG	ประตูใน DSG/DSS	กระจก DSG
01	260	250	280	260	250	310	180
02	290	280	310	290	280	340	200
03	330	300	350	320	310	380	240
04	290	280	310	290	280	340	200
05	330	300	350	320	310	380	240
06	360	350	380	360	350	410	280
07	400	380	420	400	390	450	320
08	430	420	450	430	420	480	360
09	430	420	450	430	420	480	360
10	480	450	500	470	460	530	380
11	480	450	500	470	460	530	380
12	580	500	600	550	540	630	420
13	630	600	650	620	610	680	460
14	680	650	700	680	670	730	500
15	800	750	800	780	770	830	600
16	900	800	900	850	840	930	700
17	1,100	1,000	1,100	1,050	1,040	1,130	800
18	1,200	1,100	1,200	1,150	1,140	1,230	900
19	1,100	1,000	1,100	1,050	1,040	1,130	800
20	1,200	1,100	1,200	1,150	1,140	1,230	900

Features

" DF " ventilation fans are suitable for installation in every enclosure types. They have been designed to cool and ventilate the electrical equipment inside enclosures. They are quickly and simply to replace and clean for maintenance.

Specification

- Made of heat resistance ABS (VO) Plastic
- Self extinguishable
- Air filter mat can be clean and replaced
- Electrical connection by terminals
- Color RAL 7032

FAN VENTILATION "DF-255"	
Air volume	190 CFM.
Noise level	58 dB (A)
Fan Voltage	220V. AC 50 Hz.
Power / Current	38 Watt/0.22 Amp.
Front dimension	255x255 mm.
Price / Unit	1,980.-

FAN VENTILATION "DF-130"	
Air volume	95 CFM.
Noise level	47 - 53 dB (A)
Fan Voltage	220V. AC 50 Hz.
Power / Current	22 Watt/0.14 Amp.
Front dimension	130x130 mm.
Price / Unit	1,080.-

FILTER SET "DF-255"	
Dimension	255x255 mm.
Price / Unit	800.-

FILTER SET "DF-130"	
Dimension	130x130 mm.
Price / Unit	400.-

บริษัท เดนโก้ อินดัสทรี จำกัด
DENCO INDUSTRY CO., LTD.

999 MOO 8 SAMUTPRAKARN - SAMUTSAKORN ROAD, NAKEUR
PRASAMUTJAEDEE, SAMUTPRAKARN 10290 THAILAND
CALL 02-408-5800-8 FAX 02-4085809
WWW.DENCO.CO.TH